



INSTALLATION INSTRUCTIONS FOR PART 95-8153

APPLICATIONS **LEXUS LS SERIES** **1995-2000**

**NOT FOR USE IN VEHICLES WITH FACTORY
NAVIGATION**


95-8153

KIT FEATURES


- Double DIN Radio Provision
- Stacked ISO Mount Units Provision

KIT COMPONENTS

A) Double DIN Radio Housing B) Double DIN Brackets



A



B

TOOLS REQUIRED:

Small Flat Blade Screwdriver/ Panel Removal Tool
• Phillips Screwdriver • Socket Set



1-800-221-0932



www.metraonline.com

© COPYRIGHT 2008 METRA ELECTRONICS CORPORATION



TABLE OF CONTENTS

Dash Disassembly

- Lexus LS Series 1995-2000	1
-----------------------------------	---

Kit Assembly

- Double DIN Radio Provision ...	2
- Stacked ISO Mount Units Provision	2

<u>Final Assembly</u>	3
------------------------------------	---

***Note:**


Refer also to the instructions included with the aftermarket radio.

LEXUS LS SERIES 1995-2000


- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Starting at rear of panel surrounding the shifter carefully pry up and out to remove entire panel including ashtray. (Figure A)
- 3 Using a panel removal tool or small flat blade screwdriver gently pry out on the top of the A/C vent assembly (including clock) and remove. (Figure B)
- 4 Remove (4) screws securing the factory radio/climate control assembly. Unplug and remove the assembly. (Figure C)
- 5 Remove (2) screws securing factory climate control to the assembly. Remove the climate control from the assembly and retain it for re-use during kit assembly. (Figure D)

Continue to kit assembly.


A

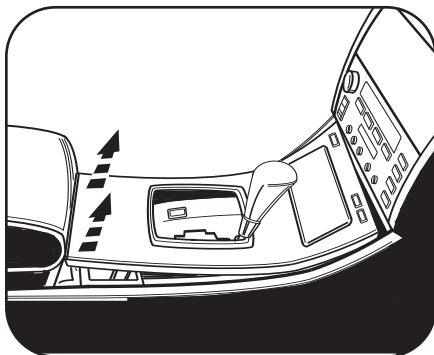


B

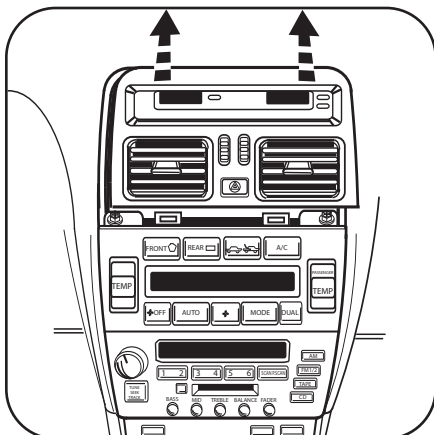

C

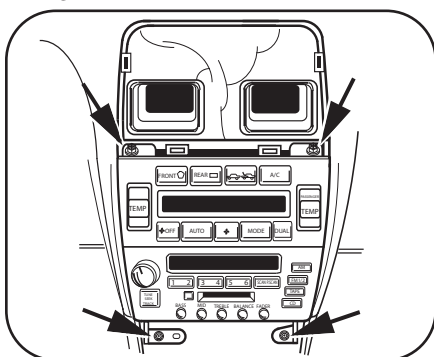

D

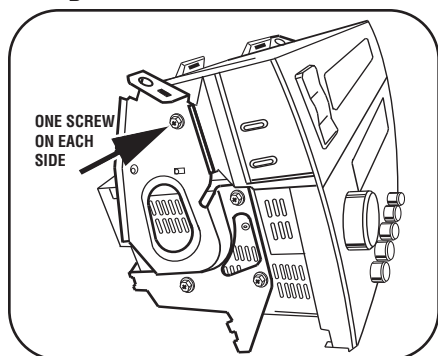




LEXUS LS SERIES 1995-2000 **DOUBLE DIN RADIO** **STACKED ISO MOUNT UNITS PROVISION**

***Note:** Refer also to the instructions included with the aftermarket radio.*


- 1** Snap the Double DIN Brackets onto the Double DIN Radio Housing.
(Figure A)
- 2** Slide the factory climate controls into the Bracket/Radio Housing assembly aligning the top of the assembly with alignment pins in the bottom of the climate controls and secure using the factory hardware. (Figure B)
- 3** Slide the Double DIN or stacked ISO mount units into the bracket/radio housing assembly and secure the Double DIN or stacked ISO mount units to the assembly using the screws supplied with the Double DIN or stacked ISO mount units. (Figure C)

Continue to final assembly.


A

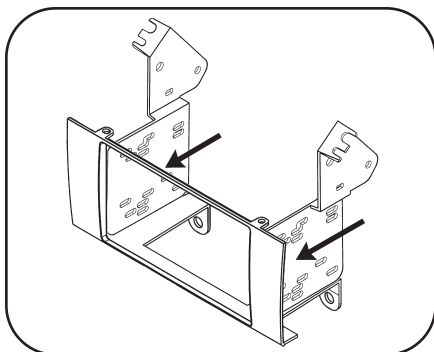


B

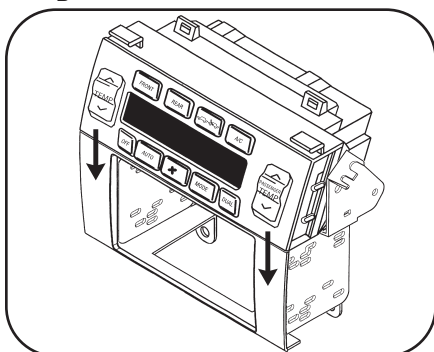

C

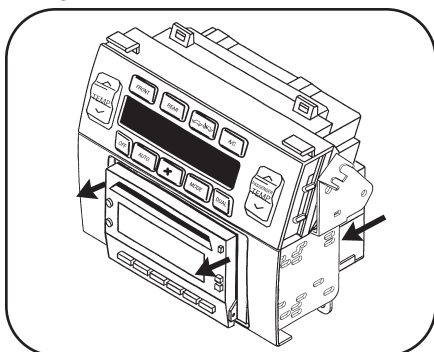

FINAL ASSEMBLY

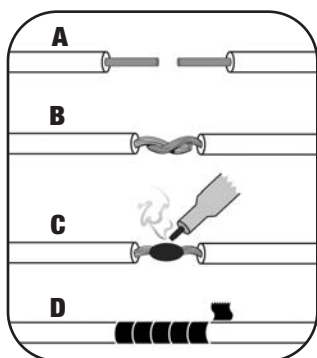

(A) Strip wire ends back 1/2"

B) Twist ends together

C) Solder

D) Tape

- 1** Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter and making connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit.)
- 2** Re-connect the negative battery terminal and test the unit for proper operation.
- 3** Reassemble radio and dash assemblies in reverse order of disassembly.

FINAL WIRING CONNECTIONS

Make wiring connections using the EIA color code chart shown below and the instructions included with the head unit. Metra recommends making connections as shown below; Strip, Splice, Solder, Tape. Isolate and individually tape off ends of any unused wires to prevent electrical short circuit.

METRA / EIA WIRING CODE

12V Ignition / Acc. Red

12V Batt / Memory. Yellow

Ground Black*

Power Antenna. Blue

Amp Turn-On Blue / White

Amp Ground. Black / White

Illumination Orange

Dimmer Orange / White

Right Front (+) Gray

Right Front (-). Gray/ Black

Left Front (+) White

Left Front (-). White / Black

Right Rear (+) Violet

Right Rear (-). Violet / Black

Left Rear (+) Green

Left Rear (-). Green / Black

***NOTE:** When a Black wire is not present, ground radio to vehicle chassis.

All colors may not be present on all leads due to manufacturer's specifications.



95-8153

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



95-8153

NOTES

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

95-8153 INSTRUCTIONS



1-800-221-0932



www.metraonline.com

REV. 04/29/08 © COPYRIGHT 2008 METRA ELECTRONICS CORPORATION INST95-8153