



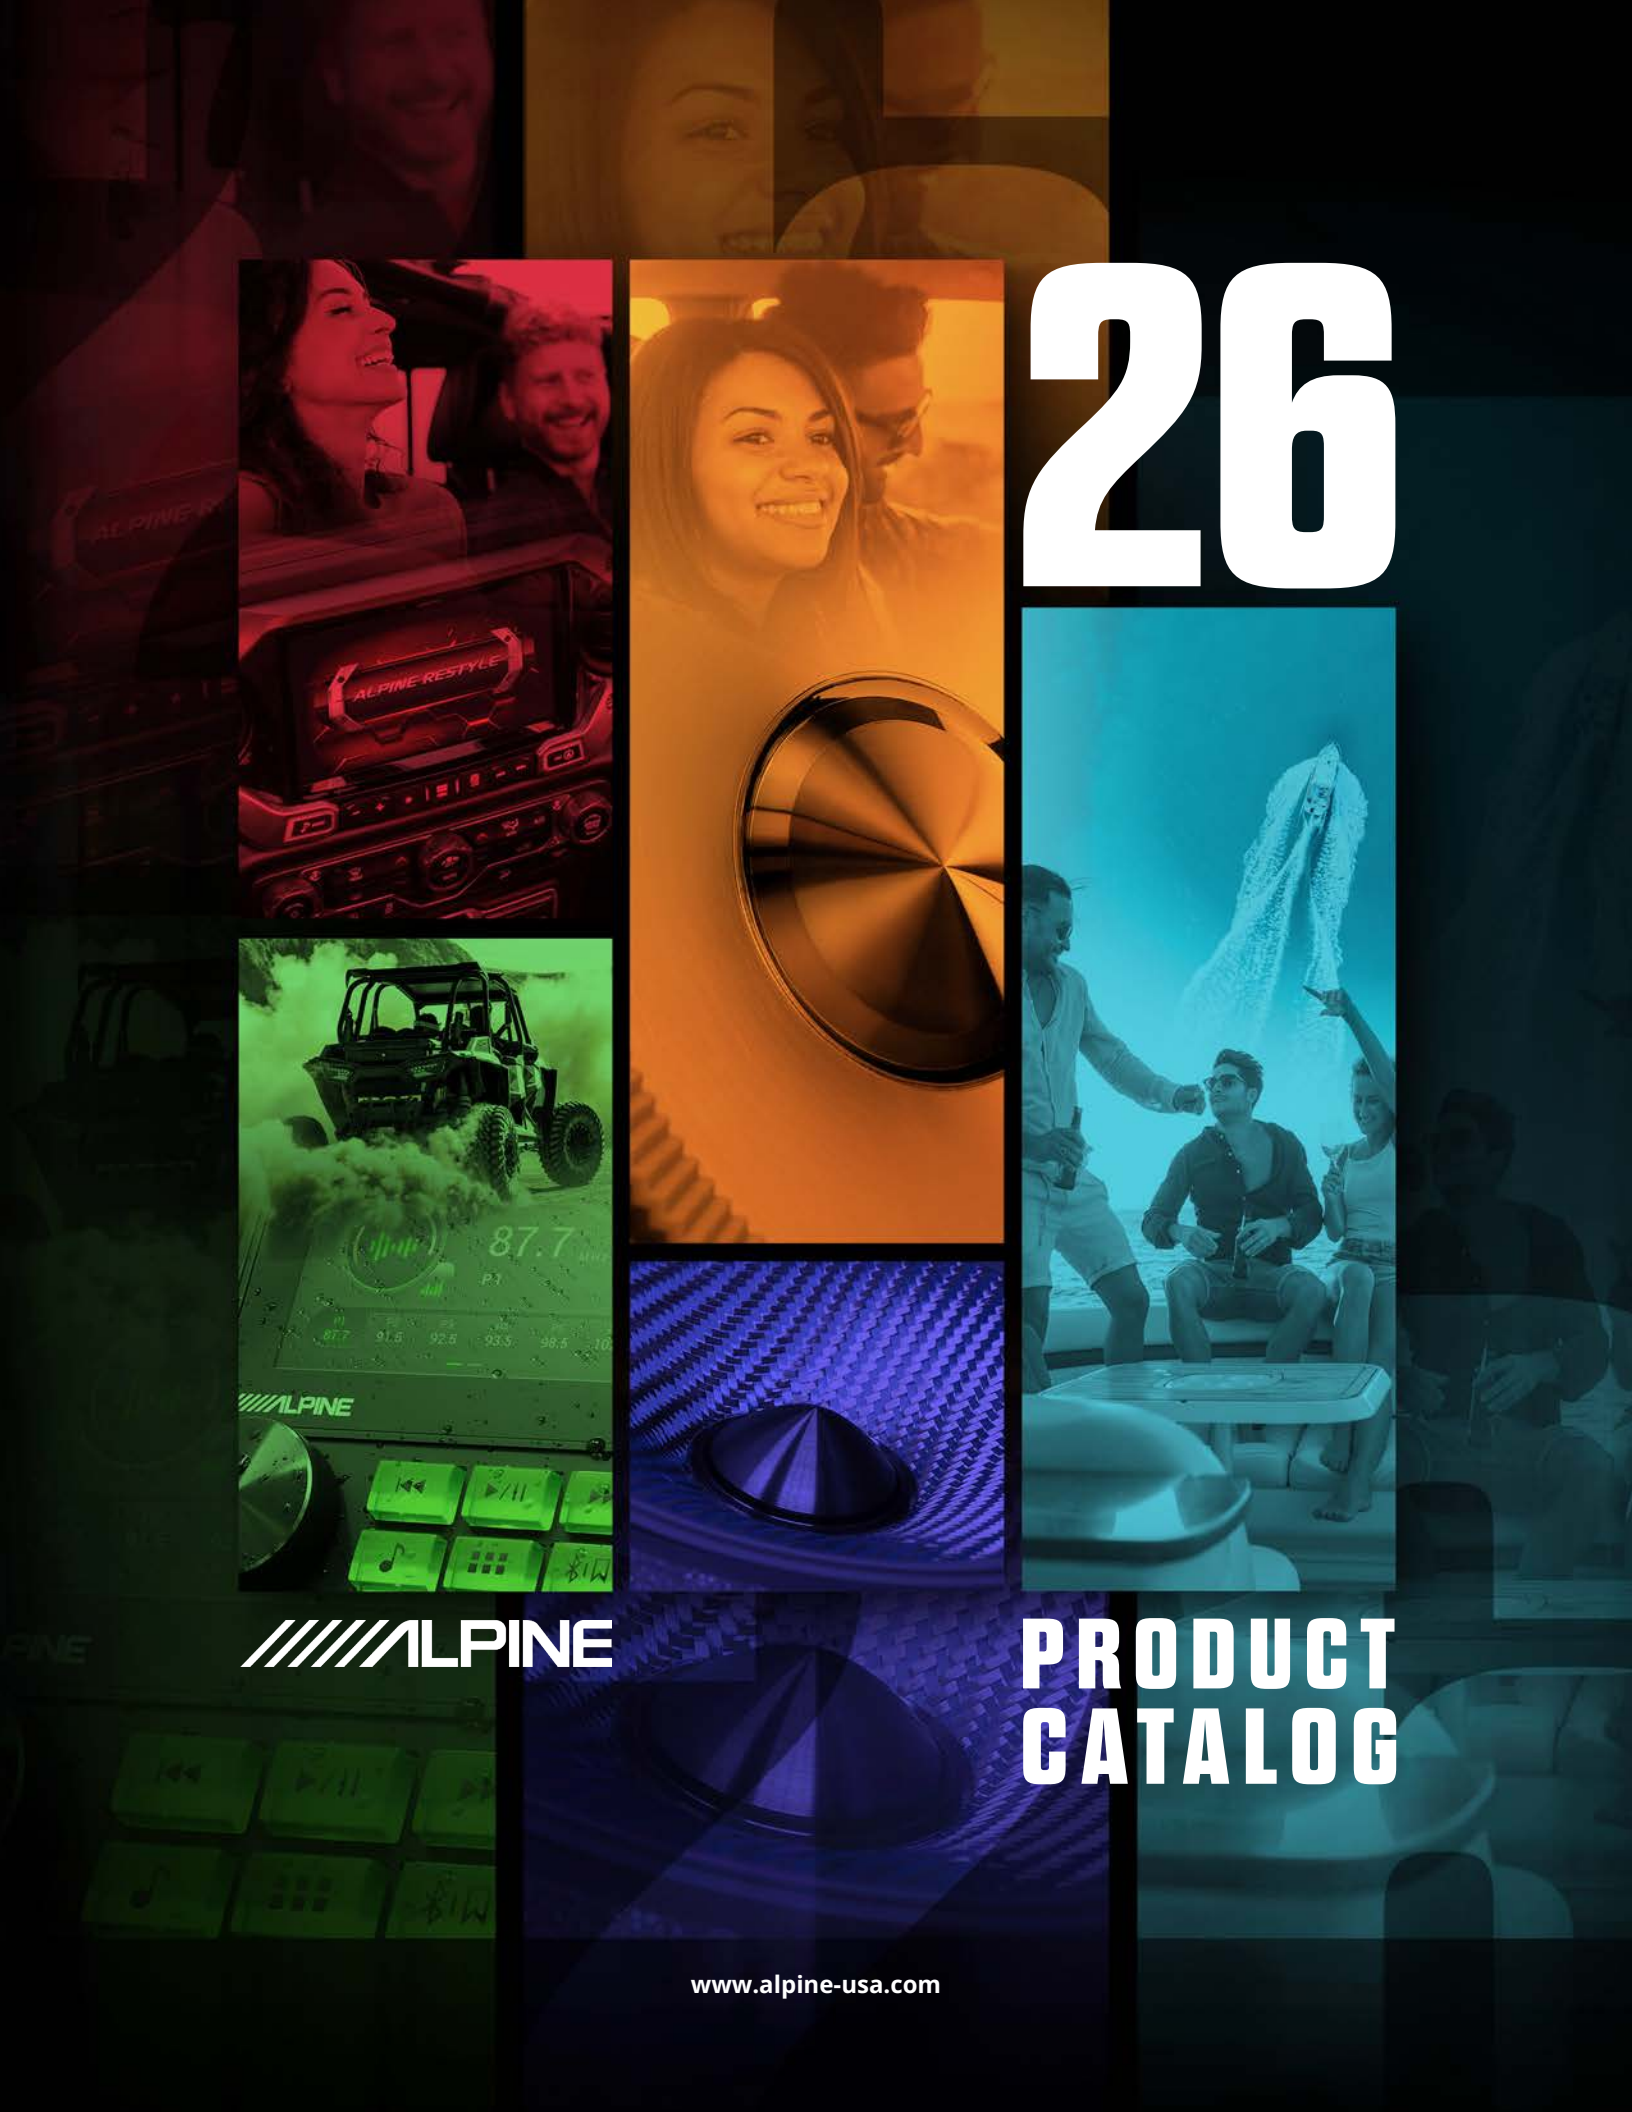

26

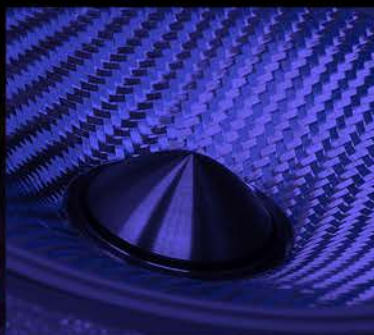

ALPINE

**PRODUCT
CATALOG**

Featured Products

Off-Road / SxS

Page 50

BASS'REV

Page 24

MARINE

Page 54

Tesla Audio

Page 40

CONTENTS

AlpineF#1Status	4
Alpine Status	6
R-Series	10
S-Series	16
OPTIM™	22
★ BassRev™	24
PrismaLink® Enclosures	28
Preloaded Enclosures	30
Truck Enclosures.....	32
★ Bass Series Subwoofers & Misc. Audio	34
Head Units & Accessories	36
Cameras, Dash Cams, & Accessories.....	38
★ Tesla Audio	40
★ Ford® F-Series Audio	44
Jeep® Audio	46
★ Off Road & SxS Audio	50
★ Marine Audio	54
Head Unit Comparison Charts.....	60

★ *New & Featured Products for 2026*

Alpine Sound. Anywhere.

Every journey has a soundtrack. From city streets to remote trails and open water, Alpine creates sound that moves with you. Wherever you drive, ride, or explore, ***Alpine delivers premium audio designed to elevate every moment behind the wheel or at the helm.***

In 2026, Alpine expands its vision of sound without limits, continuing to build on the foundations that define our brand. ***Bold, immersive displays, Hi-Res audio solutions, and advanced OEM integration technology*** remain at the core of our lineup, refined to deliver even greater performance, clarity, and seamless system transformation. ***Looking beyond the road, Alpine ventures into new terrain with purpose-built solutions for Marine, Side-by-Side, Powersports, and more.*** Engineered to withstand the elements, each system is crafted to deliver the clarity, power, and reliability that define the Alpine name.

No two vehicles are the same, and great sound should never be one-size-fits-all. That is why Alpine continues to lead with car-by-car sound solutions designed specifically for platforms like Tesla, Ford, Jeep, and more. These complete, vehicle-specific systems are engineered for seamless integration, precision fitment, and perfectly tuned performance, allowing Alpine Sound to feel like it was built into your vehicle from the start.


No matter what you drive or where the road ends, there is an Alpine solution ready to meet you there. One standard of sound. One trusted name. ***Alpine Sound, built for every journey.***



Alpine F#1 Status

The Pinnacle of Car Audio

By challenging the standard of what was possible in sound reproduction, Alpine F#1 Status was able to *achieve recording studio-level sound* in the challenging environment of the vehicle.

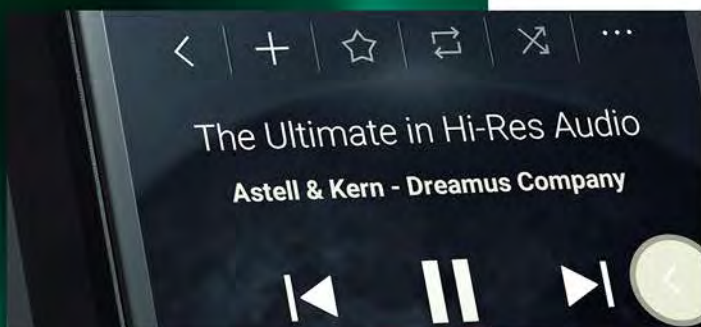

FULL SPEC HI-RES AUDIO

Digital studio recording continues to progress towards higher bit and sampling rates in order to capture the most music detail. While the convenience of low-resolution, highly-compressed music from streaming services is accepted as "good enough", much of the original music detail is lost. High-Resolution audio was created to address the listener's desire to enjoy music as the artist originally intended.

AlpineF#1Status was designed as the first complete vehicle sound system capable of not only reproducing the full-spec High-Resolution sound, 384kHz/32bit, but reproducing it inside of the challenging vehicle interior environment.



UNIFIED SPEAKER MATERIAL

Conventional car audio speakers are made with materials and a structure suited to the specific frequency ranges they are designed to reproduce. However, the characteristics and tone of instruments and vocals differ from speaker to speaker when they are made from different materials. AlpineF#1Status unified these tones by using a single material called Carbon-Fiber Reinforced Plastics (CFRP) for all speakers in the system.

More often used in aerospace and professional video equipment, CFRP makes a great speaker material because it is both lightweight and highly rigid: six times stronger than steel. Because of its unique structure, CFRP is the optimal choice for High-Resolution audio playback.



INDUSTRY-FIRST TECH

Traditionally, each digital signal device in the system is processed by an independent clock to control the signals and timing of each component. However, having several different independent clocks can cause signal misalignments, called "jitter", that occur during the Digital to Analog conversion process. This results in subtle distortions and, inevitably, the loss of musical detail.

Alpine developed the Master Clock Management System to virtually eliminate jitter by using a centralized, highly accurate "master clock" to completely synchronize the audio signal between the head unit and the audio processor. AlpineF#1Status is proud to be the first complete car audio system to achieve this high level of digital playback accuracy.





Alpine Status

Redefining Premium Audio

Designed for true enthusiasts, Alpine Status redefines the premium car audio experience through *class-leading Hi-Res Audio performance and an uncompromising commitment to quality*. Every component is engineered with precision, delivering exceptional clarity, accuracy, and musical realism for those who demand nothing less than the best.

Amplifiers & DSP's

Alpine Status



HDS-990 Hi-Res Audio

Alpine Status Digital Media Player

Hi-Res Audio Certified (192kHz / 24Bit) • Compact Controller with Separate Black Box for Flexible Installation • Alpine Classic Six-Chiclet Controls • 4V Pre-Outs: 3 • Built-in Amplifier: 25W x 4 • USB Inputs: 3 • Analog Inputs: 2-Ch AUX-In, 4-Ch Hi-Level • Digital Inputs: USB Audio & Bluetooth® • Analog Outputs: 4-Ch Hi-Level, 6-Ch RCA • Digital Outputs: Optical/Coaxial • Wired Audio Playback: AAC, AIFF, ALAC, APE, DSD, FLAC, LDAC, MP3, M4A, WMA, WAV • Wireless Audio Playback: AAC, aptX, aptX HD, LDAC, SBC



HDP-D90 Hi-Res Audio

Alpine Status 4-Channel Digital Sound Processor & Amplifier

Hi-Res Audio Certified (192kHz / 24Bit) • PC Tuning Application with Selectable Preloaded Sound System Configurations • Embedded RTA Signals for Sound Tuning • Bluetooth® Audio Streaming with included External Module • 31 Band Parametric or Graphic EQ • Hi Pass / Low Pass Crossover per Channel • Matrix Input Summing • Sampling Rate = Internal: 192kHz / 32Bit • S/N: >110dB, THD: <0.001% • Inputs: 12-Ch Hi-Level, 2-Ch RCA/Optical (SPDIF) / Coaxial (Digital) • Outputs: 10-Ch RCA Output / 12-Ch Hi-Level Amplified Outputs (50W x 8 @ 4Ω + 80W x 4 @ 4Ω)

RUX-C810

Alpine Status DSP Remote Controller

Remote Controller for Alpine Status HDP-D90 Hi-Res Digital Sound Processor / Amplifier



HDA-M80

Alpine Status 800W Mono Amplifier

High-efficiency Digital Circuit Design for Ultra-low Distortion Levels and Precise Sound Reproduction • Copper-plated Chassis • Black Circuit Board • Dimensions: 11.4375"(W) x 2.125"(H) x 7.5"(D) • Frequency Response: 8Hz - 400Hz • S/N Ratio: 83dB • Power Output: 500W x 1 @ 4Ω • 800W x 1 @ 2Ω



HDA-V90 Hi-Res Audio

Alpine Status 5-Channel Amplifier

Hi-Res Audio Certified • High-efficiency Digital Circuit Design for Ultra-low Distortion Levels and Precise Sound Reproduction • Copper-plated Chassis • Black Circuit Board • Dimensions: 11.4375"(W) x 2.125"(H) x 7.5"(D) • Frequency Response: 8Hz - 60kHz • S/N Ratio: 87dB • Power Output: 75W x 4 + 300W x 1 @ 4Ω • 100W x 4 + 500W x 1 @ 2Ω • Bridged Power: 200W x 2 @ 4Ω (Ch-1/2, Ch-3/4 only)



HDA-F60 Hi-Res Audio

Alpine Status 4-Channel Amplifier

Hi-Res Audio Certified • High-efficiency Digital Circuit Design for Ultra-low Distortion Levels and Precise Sound Reproduction • Copper-plated Chassis • Black Circuit Board • Dimensions: 11.4375"(W) x 2.125"(H) x 7.5"(D) • Frequency Response: 10Hz - 60kHz • S/N Ratio: 87dB • Power Output: 100W x 4 @ 4Ω • 150W x 4 @ 2Ω • Bridged Power: 300W x 2 @ 4Ω

Speakers & Subwoofers



HDZ-653

Alpine Status 6.5" 3-Way Custom-fit Component Speaker Set

Hi-Res Audio Certified (192kHz/24Bit w/full Alpine Status system) • Carbon Composite Diaphragm Material • Alpine Proprietary Double-Gathered Edge Surround • 6.5" Mid-Bass + 3.5" Midrange + 1.25" High-Range Custom-fit Driver • Frequency Response: 55Hz - 40kHz • Sensitivity: 88dB • Power Handling: 100W RMS / 300W Peak



HDZ-653S

Alpine Status 6.5" 3-Way OEM-fit Component Speaker Set

Hi-Res Audio Certified (192kHz/24Bit w/full Alpine Status system) • Carbon Composite Diaphragm Material • Alpine Proprietary Double-Gathered Edge Surround • 6.5" Mid-Bass + 3.5" Midrange + 1" High-Range OEM-fit Driver • Frequency Response: 55Hz - 40kHz • Sensitivity: 88dB • Power Handling: 100W RMS / 300W Peak



HDZ-65

Alpine Status 6.5" OEM-fit Coaxial Speaker Set

Hi-Res Audio Certified (192kHz/24Bit w/full Alpine Status system) • Carbon Composite Diaphragm Material • Alpine Proprietary Double-Gathered Edge Surround • 6.5" Mid-Bass with 1" Coaxial High-Range OEM-fit Driver • Frequency Response: 55Hz - 40kHz • Sensitivity: 88dB • Power Handling: 100W RMS / 300W Peak





HDZ-65C

Alpine Status 6.5" 2-Way Custom-fit Component Speaker Set

Hi-Res Audio Certified (192kHz/24Bit w/full Alpine Status system) • Carbon Composite Diaphragm Material • Alpine Proprietary Double-Gathered Edge Surround • 6.5" Mid-Bass + 1.25" High-Range Custom-fit Driver • Frequency Response: 55Hz - 40kHz • Sensitivity: 88dB • Power Handling: 100W RMS / 300W Peak



HDZ-65CS

Alpine Status 6.5" 2-Way OEM-fit Component Speaker Set

Hi-Res Audio Certified (192kHz/24Bit w/full Alpine Status system) • Carbon Composite Diaphragm Material • Alpine Proprietary Double-Gathered Edge Surround • 6.5" Mid-Bass + 1" High-Range OEM-fit Driver • Frequency Response: 55Hz - 40kHz • Sensitivity: 88dB • Power Handling: 100W RMS / 300W Peak



HDZ-W12

Alpine Status 12" Subwoofer

Pulp-Mica Cone Body • Carbon Fiber Dust Cap • Cast Aluminum Frame • Triple Stacked High-Power Strontium Ferrite Magnets (174oz x 3) • Dual Progressive Spiders with Integrated Tinsel Leads • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Included Mesh Grille with Aluminum Trim Ring • Mounting Depth: 7-3/8" • X-Max: 20mm • Voice Coil: 65mm • Frequency Response: 24Hz-200Hz • Sensitivity: 83.7dB • Nominal Impedance: 4Ω+4Ω • Power Handling: 800W RMS / 2400W Peak



HDZ-W10

Alpine Status 10" Subwoofer

Pulp-Mica Cone Body • Carbon Fiber Dust Cap • Cast Aluminum Frame • Triple Stacked High-Power Strontium Ferrite Magnets (174oz x 3) • Dual Progressive Spiders with Integrated Tinsel Leads • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Included Mesh Grille with Aluminum Trim Ring • Mounting Depth: 7-7/16" • X-Max: 20mm • Voice Coil: 65mm • Frequency Response: 26Hz-200Hz • Sensitivity: 82.2dB • Nominal Impedance: 4Ω+4Ω • Power Handling: 800W RMS / 2400W Peak



R *SERIES*

Legendary Sound Performance

When legendary sound performance meets Hi-Res Audio excellence, the reimagined Alpine R-Series lineup comes alive. ***Built for unmatched loudness and powerful bass***, R-Series delivers raw impact you don't just hear, you feel.

Amplifiers



R2-AI50M

R-Series 1500W Mono Amplifier

Alpine's Class D Amplifier Circuit • One-Sided Terminal Layout • Top Panel Sound Controls • Integrated Mounting Feet • Dimensions: 13.5"(W) x 2.6"(H) 7.3"(D) • Frequency Response: 10Hz - 400Hz • S/N Ratio: >75dB • Power Output: 700W x 1 @ 4Ω • 1200W x 1 @ 2Ω • 1500W x 1 @ 1Ω



R2-A75M

R-Series 750W Mono Amplifier

Alpine's Class D Amplifier Circuit • One-Sided Terminal Layout • Top Panel Sound Controls • Integrated Mounting Feet • 15% Smaller Footprint than Previous Model (R-A75M) • Dimensions: 11.1"(W) x 2.17"(H) 6.5"(D) • Frequency Response: 10Hz - 400Hz • S/N Ratio: >75dB • Power Output: 500W x 1 @ 4Ω • 750W x 1 @ 2Ω



R2-A60F



R-Series 4-Channel Amplifier

Hi-Res Audio Certified • Alpine's Class D Amplifier Circuit • One-Sided Terminal Layout • Top Panel Sound Controls • Integrated Mounting Feet • 15% Smaller Footprint than Previous Model (R-A60F) • Dimensions: 11.1"(W) x 2.17"(H) 6.5"(D) • Frequency Response: 10Hz - 45kHz • S/N Ratio: >80dB • Power Output: 100W x 4 @ 4Ω • 150W x 4 @ 2Ω



R-A90S



R-Series 6/5/3-Channel Amplifier

Hi-Res Audio Certified • Alpine's Class D Amplifier Circuit • Staggered Power Channel Layout • Dimensions: 12.75"(W) x 2"(H) 10.75"(D) • Frequency Response: 10Hz - 45kHz • S/N Ratio: >85dB • Power Output: 75W x 4 @ 4Ω + 150W x 2 @ 4Ω • 100W x 4 @ 2Ω + 250W x 2 @ 2Ω • Bridged Power: 200W x 2 @ 4Ω + 500W x 1 @ 4Ω

Speakers



R2-S653

R-Series Pro 3-Way Component Speaker Set

Hi-Res Audio Certified • Glass Fiber Reinforced Cone • Die-Cast Aluminum Basket • Ferrite Magnet Structure • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Premium-Grade Full Passive Performance Crossover Networks • Magnesium Hard-Dome Tweeters with Swivel Mount Design and Threaded Removable Housing • Protective Mesh Grilles Included • 6.5" Mid-Bass + 3" Midrange + 1" Tweeter • Frequency Response: 65Hz - 40kHz • Power Handling: 100W RMS / 300W Peak

R2-S652

R-Series Pro 2-Way Component Speaker Set

Hi-Res Audio Certified • Glass Fiber Reinforced Cone • Die-Cast Aluminum Basket • Ferrite Magnet Structure • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Premium-Grade Full Passive Performance Crossover Networks • Magnesium Hard-Dome Tweeters with Swivel Mount Design and Threaded Removable Housing • Protective Mesh Grilles Included • 6.5" Mid-Bass + 1" Tweeter • Frequency Response: 65Hz - 40kHz • Power Handling: 100W RMS / 300W Peak





R2-S69C Hi-Res Audio

R-Series 6x9" Component Speaker Set

Hi-Res Audio Certified • Glass Fiber Reinforced Cone • Ferrite Magnet Structure • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Magnesium Hard-Dome Tweeters with Swivel Mount Design and Threaded Removable Housing • Protective Mesh Grilles Included • 6x9" Mid-Bass + 1" Tweeter • Frequency Response: 60Hz - 40kHz • Power Handling: 100W RMS / 300W Peak



R2-S65C Hi-Res Audio

R-Series 6.5" Component Speaker Set

Hi-Res Audio Certified • Glass Fiber Reinforced Cone • Ferrite Magnet Structure • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Magnesium Hard-Dome Tweeters with Swivel Mount Design and Threaded Removable Housing • Protective Mesh Grilles Included • 6.5" Mid-Bass + 1" Tweeter • Frequency Response: 65Hz - 40kHz • Power Handling: 100W RMS / 300W Peak



R2-S69 Hi-Res Audio

R-Series 6x9" Coaxial Speaker Set

Hi-Res Audio Certified • Glass Fiber Reinforced Cone • Ferrite Magnet Structure • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Magnesium Hard-Dome Tweeters with Swivel Mount Design and Threaded Removable Housing • Protective Mesh Grilles Included • 6x9" Mid-Bass + 1" Tweeter (Coaxial) • Frequency Response: 60Hz - 40kHz • Power Handling: 100W RMS / 300W Peak



R2-S65 Hi-Res Audio

R-Series 6.5" Coaxial Speaker Set

Hi-Res Audio Certified • Glass Fiber Reinforced Cone • Ferrite Magnet Structure • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Magnesium Hard-Dome Tweeters with Swivel Mount Design and Threaded Removable Housing • Protective Mesh Grilles Included • 6.5" Mid-Bass + 1" Tweeter (Coaxial) • Frequency Response: 65Hz - 40kHz • Power Handling: 100W RMS / 300W Peak

R2-W12D4 / D2

R-Series 12" Subwoofer

Kevlar Reinforced Pulp Cone • Polypropylene / Ceramic Composite Dust Cap • Larger, Double-stacked Magnets for More Powerful Bass Output • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth: 6.5" • X-Max: 20mm • Voice Coil: 65mm • Frequency Response: 24Hz-200Hz • Sensitivity: 84.5dB • Nominal Impedance: 2Ω (4+4) for R2-W12D4 or 4Ω (2+2) for R2-W12D2 • Power Handling: 750W RMS / 2250W Peak • Compatible with KTE-12G.3 Subwoofer Grille (Sold Separately)



R2-W10D4 / D2

R-Series 10" Subwoofer

Kevlar Reinforced Pulp Cone • Polypropylene / Ceramic Composite Dust Cap • Larger, Double-stacked Magnets for More Powerful Bass Output • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth: 6" • X-Max: 20mm • Voice Coil: 65mm • Frequency Response: 26Hz-200Hz • Sensitivity: 82.4dB • Nominal Impedance: 2Ω (4+4) for R2-W10D4 or 4Ω (2+2) for R2-W10D2 • Power Handling: 750W RMS / 2250W Peak • Compatible with KTE-10G.3 Subwoofer Grille (Sold Separately)



R2-W8D4 / D2

R-Series 8" Subwoofer


Kevlar Reinforced Pulp Cone • Polypropylene / Ceramic Composite Dust Cap • Larger, Double-stacked Magnets for More Powerful Bass Output • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth: 4.375" • X-Max: 12mm • Voice Coil: 35mm • Frequency Response: 30Hz-200Hz • Sensitivity: 83.5dB • Nominal Impedance: 2Ω (4+4) for R2-W10D4 or 4Ω (2+2) for R2-W10D2 • Power Handling: 350W RMS / 1000W Peak • Compatible with KTE-8G.3 Subwoofer Grille (Sold Separately)



KTE-12G.3 / KTE-10G.3 / KTE-8G.3

R-Series Subwoofer Grille

Available in 12" (KTE-12G.3), 10" (KTE-10G.3), and 8" (KTE-8G.3) Models

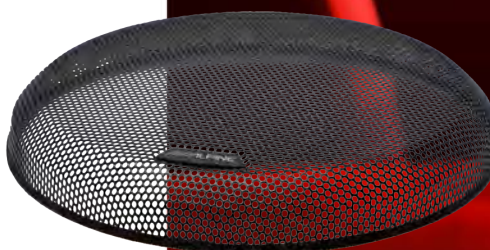

Subwoofers



RS-W12D4 / D2

R-Series 12" Shallow Mount Subwoofer


High-Performance Shallow Bass Driver • Alpine Gen2 DD Linear Magnetic Circuit • Cast Aluminum Frame • Aluminum Dust Cap • Neodymium Magnet • Mounting Depth: 3.25" • X-Max: 20mm • Voice Coil: 4" (102mm) • Frequency Response 25Hz-100Hz • Sensitivity: 82 dB • Nominal Impedance: 2Ω (4+4) for RS-W12D4 or 4Ω (2+2) for RS-W12D2 • Power Handling: 600W RMS / 1800W Peak • Compatible with KTE-RS12G Subwoofer Grille Kit (Sold Separately)



RS-W10D4 / D2

R-Series 10" Shallow Mount Subwoofer

High-Performance Shallow Bass Driver • Alpine Gen2 DD Linear Magnetic Circuit • Cast Aluminum Frame • Aluminum Dust Cap • Neodymium Magnet • Mounting Depth: 3.25" • X-Max: 20mm • Voice Coil: 4" (102mm) • Frequency Response 25Hz-100Hz • Sensitivity: 79 dB • Nominal Impedance: 2Ω (4+4) for RS-W10D4 or 4Ω (2+2) for RS-W10D2 • Power Handling: 600W RMS / 1800W Peak • Compatible with KTE-RS10G Subwoofer Grille Kit (Sold Separately)

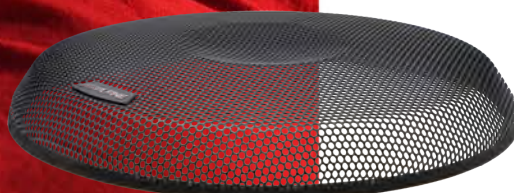

KTE-RS12G / KTE-RS10G

R-Series Shallow Subwoofer Grille

Available in 12" (KTE-RS12G) & 10" (KTE-RS10G)



Rediscover Your Music

Designed for music lovers, Alpine S-Series delivers the *premium Alpine sound people expect without the premium price tag*. With rich detail and balanced sound, S-Series breathes new life into your favorite tracks.

Amplifiers



S2-AI20M

S-Series 1200W Mono Amplifier

Alpine's Class D Amplifier Circuit • Built-in Selectable / Adjustable Crossovers • Dimensions: 13.8"(W) x 2.25"(H) 8.25"(D) • Frequency Response: 20Hz - 400Hz • S/N Ratio: >85dB • Power Output: 600W x 1 @ 4Ω • 1200W x 1 @ 2Ω • 1200W x 1 @ 1Ω



S2-A60M

S-Series 600W Mono Amplifier

Alpine's Class D Amplifier Circuit • Built-in Selectable / Adjustable Crossovers • Dimensions: 8.7"(W) x 2.25"(H) 8.25"(D) • Frequency Response: 10Hz - 400Hz • S/N Ratio: >85dB • Power Output: 330W x 1 @ 4Ω • 600W x 1 @ 2Ω • 600W x 1 @ 1Ω



S2-A55V



S-Series 5-Channel Amplifier

Hi-Res Audio Certified • Alpine's Class D Amplifier Circuit • Built-in Selectable / Adjustable Crossovers • Dimensions: 11.9"(W) x 2.25"(H) 8.25"(D) • Frequency Response: 20Hz - 40kHz • S/N Ratio: >83dB • Power Output: 40W x 4 + 200W x 1 @ 4Ω • 60W x 4 + 300W x 1 @ 2Ω • Bridged Power: 120W x 2 @ 4Ω



S2-A36F



S-Series 4-Channel Amplifier

Hi-Res Audio Certified • Alpine's Class D Amplifier Circuit • Built-in Selectable / Adjustable Crossovers • Dimensions: 8.7"(W) x 2.25"(H) 8.25"(D) • Frequency Response: 20Hz - 40kHz • S/N Ratio: >83dB • Power Output: 60W x 4 @ 4Ω • 90W x 4 @ 2Ω • Bridged Power: 180W x 2 @ 4Ω



RUX-KNOB.2

Remote Bass Knob for Alpine Amplifiers

Add on remote bass level control knob for Alpine Status, R-Series, S-Series, and KTA Power Pack Amplifiers

Speakers



S2-S80C

S-Series 8" Component Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • OEM Fitment with In-Line Crossovers • 8" Mid-Bass + 1" Tweeter (S2-S10TW) • Frequency Response: 50Hz - 40kHz • Sensitivity: 90dB • Power Handling: 85W RMS / 260W Peak



Pictured with KTE-S69G Grille

S2-S69C

S-Series 6x9" Component Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • OEM Fitment with In-Line Crossovers • 6x9" Mid-Bass + 3" Midrange with 1" Tweeter (S2-S10TW) • Frequency Response: 65Hz - 40kHz • Sensitivity: 90dB • Power Handling: 85W RMS / 260W Peak • Compatible with KTE-S69G Speaker Grille (Sold Separately)

KTE-S69G / 65G / 50G

S-Series Speaker Grilles

Available in 6x9" (KTE-S69G - shown above), 6.5" (KTE-S65G), & 5" (KTE-S50G)



S2-S65C

S-Series 6.5" Component Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • OEM Fitment with In-Line Crossovers • 6.5" Mid-Bass + 1" Tweeter (S2-S10TW) • Frequency Response: 70Hz - 40kHz • Sensitivity: 88dB • Power Handling: 80W RMS / 240W Peak • Compatible with KTE-S65G Speaker Grille (Sold Separately)



S2-S40C

S-Series 4" Component Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • OEM Fitment with In-Line Crossovers • 4" Mid-Bass + 1" Tweeter (S2-S10TW) • Frequency Response: 97Hz - 40kHz • Sensitivity: 86dB • Power Handling: 45W RMS / 140W Peak



S2-S69 

S-Series 6x9" Coaxial Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • 6x9" Mid-Bass + 1" Tweeter (Coaxial) • Frequency Response: 65Hz - 40kHz • Sensitivity: 90dB • Power Handling: 85W RMS / 260W Peak • Compatible with KTE-S69G Speaker Grille (Sold Separately)



S2-S65 

S-Series 6.5" Coaxial Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • 6.5" Mid-Bass + 1" Tweeter (Coaxial) • Frequency Response: 70Hz - 40kHz • Sensitivity: 88dB • Power Handling: 80W RMS / 240W Peak • Compatible with KTE-S65G Speaker Grille (Sold Separately)



S2-S68 

S-Series 6x8" Coaxial Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • 6x8" Mid-Bass + 1" Tweeter (Coaxial) • Frequency Response: 73Hz - 40kHz • Sensitivity: 88dB • Power Handling: 75W RMS / 230W Peak



S2-S50 

S-Series 5" Coaxial Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • 5" Mid-Bass + 3/4" Tweeter (Coaxial) • Frequency Response: 80Hz - 40kHz • Sensitivity: 87dB • Power Handling: 55W RMS / 170W Peak • Compatible with KTE-S50G Speaker Grille (Sold Separately)



S2-S40 

S-Series 4" Coaxial Speaker Set

Hi-Res Audio Certified • Polypropylene + Glass Fiber + Mica Cone Material • 4" Mid-Bass + 3/4" Tweeter (Coaxial) • Frequency Response: 97Hz - 40kHz • Sensitivity: 86dB • Power Handling: 45W RMS / 140W Peak



S2-S30 

S-Series 3" Coaxial Speaker Set

Hi-Res Audio Certified • Pulp Cone • 3" Mid-Range + 3/4" Tweeter (Coaxial) • Frequency Response: 230Hz - 40kHz • Sensitivity: 83dB • Power Handling: 85W RMS / 260W Peak



S2-S10TW 

S-Series 3/4" Tweeters

Hi-Res Audio Certified • 1" Cloth Dome Tweeter • Updated Dome Design for Improved Control & Smoothness • Swivel Flush-Mount Design • Removal Housing • Frequency Response: 1kHz - 40kHz • Power Handling: 80W RMS / 240W Peak

Subwoofers

S2-W12D4 / D2

S-Series 12" Subwoofer

Carbon Fiber / Polypropylene Cone for Lightweight Construction with High Output and Low Distortion • Dual Voice Coil Subwoofers with Configuration Jumpers • Enhanced "Punch" and Accurate Bass • High-Grade Strontium Ferrite Magnets • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth: 4.89" • Frequency Response: 23Hz-215Hz • Sensitivity: 86dB • Nominal Impedance: 2Ω (4+4) for S2-W12D4 or 4Ω (2+2) for S2-W12D2 • Power Handling: 600W RMS / 1800W Peak



S2-W10D4 / D2

S-Series 10" Subwoofer

Carbon Fiber / Polypropylene Cone for Lightweight Construction with High Output and Low Distortion • Dual Voice Coil Subwoofers with Configuration Jumpers • Enhanced "Punch" and Accurate Bass • High-Grade Strontium Ferrite Magnets • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth: 4.54" • Frequency Response: 25Hz-215Hz • Sensitivity: 85dB • Nominal Impedance: 2Ω (4+4) for S2-W10D4 or 4Ω (2+2) for S2-W10D2 • Power Handling: 600W RMS / 1800W Peak



S2-W8D4 / D2

S-Series 8" Subwoofer

Carbon Fiber / Polypropylene Cone for Lightweight Construction with High Output and Low Distortion • Dual Voice Coil Subwoofers with Configuration Jumpers • Enhanced "Punch" and Accurate Bass • High-Grade Strontium Ferrite Magnets • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth: 3.71" • Frequency Response: 35Hz-215Hz • Sensitivity: 83dB • Nominal Impedance: 2Ω (4+4) for S2-W8D4 or 4Ω (2+2) for S2-W8D2 • Power Handling: 300W RMS / 900W Peak






KTE-12G.3 / KTE-10G.3 / KTE-8G.3

S-Series Subwoofer Grilles

Available in 12" (KTE-12G.3), 10" (KTE-10G.3), and 8" (KTE-8G.3)



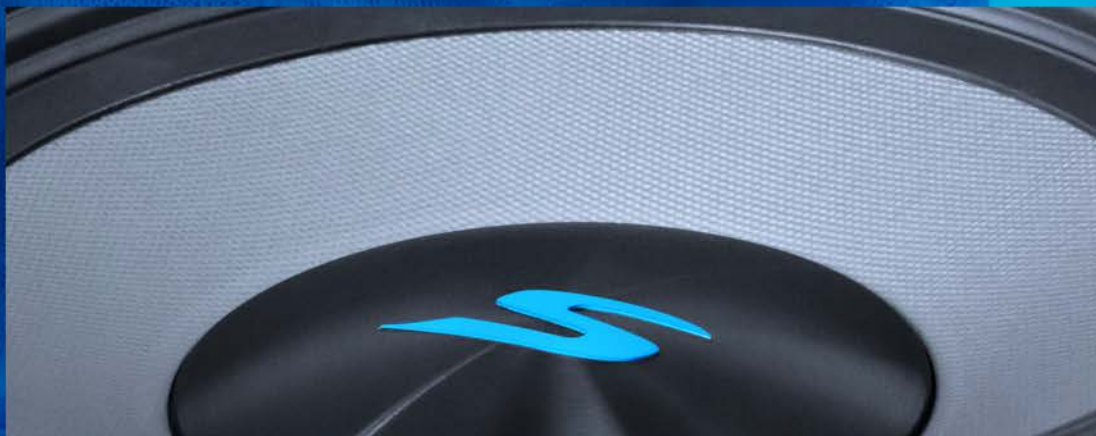

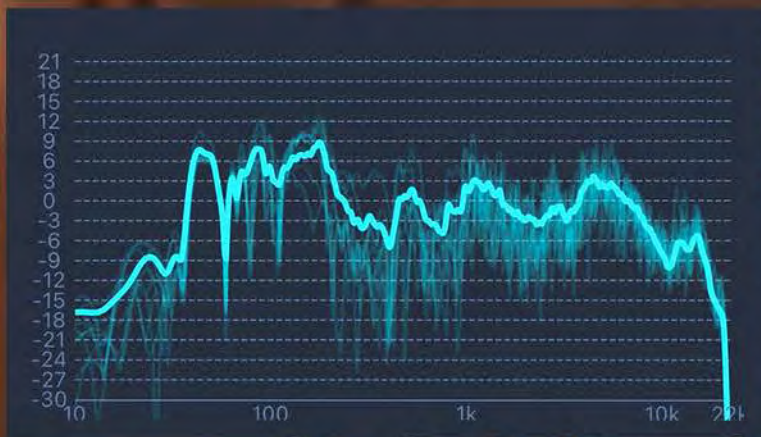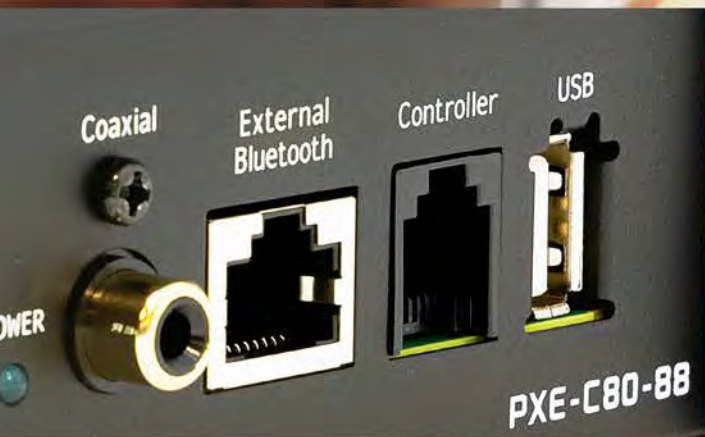

OPTIM™


Professional Grade Audio Made Simple

Get closer to your favorite artists with the high-precision tuning power of Alpine OPTIM™. Delivering *professional-grade audio performance with everyday convenience*, OPTIM™ transforms complex system tuning into a simple, step-by-step process you control directly from your smartphone.

PXE-C80-88

Alpine OPTIM8® 8-Channel Hi-Res Sound Processor & Amplifier with AutoEQ 2.0

8-Channel Hi-Res (96kHz/24Bit) Digital Sound Processor with Built-in Internal Amplifier • All-in-One Solution to Effortlessly Optimize and Amplify any Sound System in Minutes • Remove the Complexities of Sound Tuning with Simple, Self-Guided AutoEQ 2.0 Software via iOS App (iPhone / iPad), Android App, or PC App • Innovative AutoEQ Software Analyzes your Vehicle's Interior Acoustic Environment and Intelligently Adjusts the Audio Output for the Best Possible Listening Experience • Anti-EQ for OEM Systems (Eliminates Factory EQ Curve) • Center Image Mode for Optimal Listening Experience • 4 Target Curve Presets: 1, 2, 3, and Default • Access Adjustments on the fly with a compatible external mic kit (sold separately) • 8-Channel High-Level / 6-Channel RCA Audio Signal / Bluetooth® Audio Input • Outputs: 8-Channel 4V RCA • 31 Band Parametric & Graphic EQ, Time Correction on all 8 Channels • Digital Inputs: Coax, USB (DAC) • Speaker Input: Up to 30V • Built-in 8-Channel Amplifier: 50W x 6 @ 4Ω + 150W x 2 @ 4Ω or 50W x 6 @ 2Ω + 300W x 2 @ 2Ω • Dimensions: 9.25"(W) x 9.5"(H) x 2"(D)

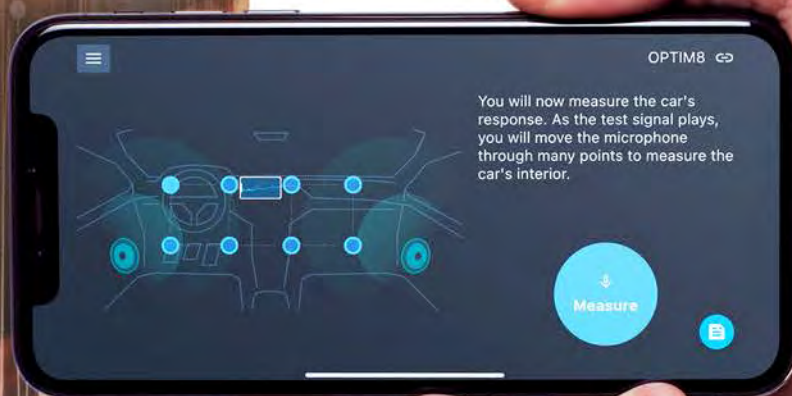

AutoEQ 2.0

Delivering faster, smarter, and more precise sound tuning completely from your smartphone.
(Compatible with Apple & Android)



'BASS'REV

Larger-than-Life Bass

Introducing BassRev™ — a new speaker lineup engineered to outperform its size. High-excursion designs do the heavy lifting, while OPTIM8® & OPTIM™ Sync technology utilizes BassRev-specific tuning, giving speakers and subs a ***larger-than-life presence and cleaner, deeper bass.***

Speakers

BASS'REV



BRV-S80C NEW

BassRev™ 8" Component Speaker Set

Optimized to be paired actively with Alpine OPTIM8® using OPTIM™ Sync & BassRev Tuning Algorithm • Engineered for Increased Mid and Low-end Performance (sub-like impact) • Upgraded Bass Performance when Tuned with OPTIM8® • H.E.D.G.E. Surround for Increased Bass Output • Polypropylene Cone with Unique Lapel Shape for Higher Excursion & Increased Rigidity • Ferrite Magnet • Gun Metal Chemical Coating for Premium, Durable Finish • 8" Mid-Bass + 3/4" Tweeter • Frequency Response w/BassRev Tuning ON: 35Hz - 20kHz • Frequency Response w/BassRev Tuning OFF: 55Hz - 20kHz • Power Handling: 50W RMS / 150W Peak



BRV-S65C NEW

BassRev™ 6.5" Component Speaker Set

Optimized to be paired actively with Alpine OPTIM8® using OPTIM™ Sync & BassRev Tuning Algorithm • Engineered for Increased Mid and Low-end Performance • Upgraded Bass Performance when Tuned with OPTIM8® • H.E.D.G.E. Surround for Increased Bass Output • Polypropylene Cone with Unique Lapel Shape for Higher Excursion & Increased Rigidity • Ferrite Magnet • Gun Metal Chemical Coating for Premium, Durable Finish • 6.5" Mid-Bass + 3/4" Tweeter • Frequency Response w/BassRev Tuning ON: 38Hz - 20kHz • Frequency Response w/BassRev Tuning OFF: 60Hz - 20kHz • Power Handling: 50W RMS / 150W Peak



BRV-S40C NEW

BassRev™ 4" Component Speaker Set

Optimized to be paired actively with Alpine OPTIM8® using OPTIM™ Sync & BassRev Tuning Algorithm • Engineered for Increased Mid and Low-end Performance • Upgraded Bass Performance when Tuned with OPTIM8® • H.E.D.G.E. Surround for Increased Bass Output • Polypropylene Cone with Unique Lapel Shape for Higher Excursion & Increased Rigidity • Ferrite Magnet • Gun Metal Chemical Coating for Premium, Durable Finish • 4" Mid-Bass + 3/4" Tweeter • Frequency Response w/BassRev Tuning ON: 67Hz - 20kHz • Frequency Response w/BassRev Tuning OFF: 75Hz - 20kHz • Power Handling: 50W RMS / 150W Peak



BRV-S65 NEW

BassRev™ 6.5" Coaxial Speaker Set

Optimized to be paired actively with Alpine OPTIM8® using OPTIM™ Sync & BassRev Tuning Algorithm • Engineered for Increased Mid and Low-end Performance • Upgraded Bass Performance when Tuned with OPTIM8® • H.E.D.G.E. Surround for Increased Bass Output • Polypropylene Cone with Unique Lapel Shape for Higher Excursion & Increased Rigidity • Ferrite Magnet • Inlaid (Recessed) Coaxial Tweeter for Unified Sound & Cleaner Imaging • Gun Metal Chemical Coating for Premium, Durable Finish • 6.5" Mid-Bass w/Inlaid 3/4" Tweeter (Coaxial) • Frequency Response w/BassRev Tuning ON: 38Hz - 20kHz • Frequency Response w/BassRev Tuning OFF: 60Hz - 20kHz • Power Handling: 50W RMS / 150W Peak



BRV-S40 NEW

BassRev™ 4" Coaxial Speaker Set

Optimized to be paired actively with Alpine OPTIM8® using OPTIM™ Sync & BassRev Tuning Algorithm • Engineered for Increased Mid and Low-end Performance • Upgraded Bass Performance when Tuned with OPTIM8® • H.E.D.G.E. Surround for Increased Bass Output • Polypropylene Cone with Unique Lapel Shape for Higher Excursion & Increased Rigidity • Ferrite Magnet • Gun Metal Chemical Coating for Premium, Durable Finish • 4" Mid-Bass w/3/4" Tweeter (Coaxial) • Frequency Response w/BassRev Tuning ON: 67Hz - 20kHz • Frequency Response w/BassRev Tuning OFF: 75Hz - 20kHz • Power Handling: 50W RMS / 150W Peak

NEW PWV-SB12

BassRev™ 12" Powered Shallow Subwoofer Enclosure with Optim™ Sync Technology

Preloaded 12" BassRev™ Subwoofer • Built-in 400W RMS Amplifier & DSP with OPTIM™ Sync Technology • Alpine Proprietary OPTIM™ Sync Algorithm for added Dynamic Bass Boost Performance (BassRev™-specific Tuning) • Shallow Enclosure for Flexible Fitment (6-5/8" depth) • Sealed Design that Emphasizes Low-end Punch & Feel • Engineered to Deliver the Impact of a Full-Size Sub Enclosure • Carpeted MDF Enclosure w/Double Brace Structure • Alpine Embroidered Top • Extended Grille Design • Dimensions: 21"(W) x 13-1/2"(H) x 6-5/8"(D) • Weight: 32lbs • Frequency Response: 31Hz-200Hz • Dual 4Ω Voice Coils (4 Ω + 4 Ω) • Power Handling: 400W RMS / 800W Peak



NEW PWV-SB10

BassRev™ 10" Powered Shallow Subwoofer Enclosure with Optim™ Sync Technology

Preloaded 10" BassRev™ Subwoofer • Built-in 400W RMS Amplifier & DSP with OPTIM™ Sync Technology • Alpine Proprietary OPTIM™ Sync Algorithm for added Dynamic Bass Boost Performance (BassRev™-specific Tuning) • Shallow Enclosure for Flexible Fitment (5" depth) • Sealed Design that Emphasizes Low-end Punch & Feel • Engineered to Deliver the Impact of a Full-Size Sub Enclosure • Carpeted MDF Enclosure w/Double Brace Structure • Alpine Embroidered Top • Extended Grille Design • Dimensions: 18-1/2"(W) x 11-1/8"(H) x 5"(D) • Weight: 21lbs • Frequency Response: 31Hz-200Hz • Dual 4Ω Voice Coils (4 Ω + 4 Ω) • Power Handling: 400W RMS / 800W Peak



Subwoofer Enclosures

BASS'REV



A black Alpine PrismaLink subwoofer enclosure is installed in the trunk of a car. The enclosure features two large circular speakers with a blue 'S' logo in the center of the cones. The enclosure is illuminated with vibrant, multi-colored RGB lighting that runs vertically along the sides and horizontally across the top. The car's interior is dark, and the trunk is open, showing the enclosure's fit within the space.

PrismaLink®

A New Spectrum of Sound

Color and sound collide with PrismaLink®, an intentionally crafted wedge enclosure designed for optimal bass performance and simple vehicle fitment. An integrated RGB lighting system adds a bold visual dimension, transforming sound into an experience you can see and feel.

PrismaLink® Enclosures

S2-SB12

12" PrismaLink® S-Series Preloaded Subwoofer Wedge Enclosure

Sealed Wedge Style Enclosure with Preloaded S2-W12D4 12" S-Series Subwoofer • RGBW Multi-color Trim Bar Lighting with IR Remote • 12 Static Colors, 4-Dynamic Modes • Multi-Link Capable (Link 2 or more enclosures together) • Carbon Fiber / Poly Propylene Subwoofer Cone for Lightweight Construction with High Output and Low Distortion • Enhanced "Punch" and Accurate Bass • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Dimensions: 16.5"(W) x 15"(H) x 13.25"(D) • Frequency Response: 23Hz-215Hz • Sensitivity: 86dB • Nominal Impedance: 2Ω (4+4) • Power Handling: 600W RMS / 1800W Peak • Compatible with KTX-LK12 Linking Kit & KTX-EBKT Mounting Brackets • Compatible with iLX-W770-M & iLX-W670-M for Lighting Link Control

S2-SB10

10" PrismaLink® S-Series Preloaded Subwoofer Wedge Enclosure

Sealed Wedge Style Enclosure with Preloaded S2-W10D4 10" S-Series Subwoofer • RGBW Multi-color Trim Bar Lighting with IR Remote • 12 Static Colors, 4-Dynamic Modes • Multi-Link Capable (Link 2 or more enclosures together) • Carbon Fiber / Poly Propylene Subwoofer Cone for Lightweight Construction with High Output and Low Distortion • Enhanced "Punch" and Accurate Bass • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Dimensions: 14.5"(W) x 13"(H) x 11.25"(D) • Frequency Response: 25Hz-215Hz • Sensitivity: 85dB • Nominal Impedance: 2Ω (4+4) • Power Handling: 600W RMS / 1800W Peak • Compatible with KTX-LK10 Linking Kit & KTX-EBKT Mounting Brackets • Compatible with iLX-W770-M & iLX-W670-M for Lighting Link Control

S2-SB8

8" PrismaLink® S-Series Preloaded Subwoofer Wedge Enclosure

Sealed Wedge Style Enclosure with Preloaded S2-W8D4 8" S-Series Subwoofer • RGBW Multi-color Trim Bar Lighting with IR Remote • 12 Static Colors, 4-Dynamic Modes • Multi-Link Capable (Link 2 or more enclosures together) • Carbon Fiber / Poly Propylene Subwoofer Cone for Lightweight Construction with High Output and Low Distortion • Enhanced "Punch" and Accurate Bass • High-Amplitude Multi-Roll (H.A.M.R.) Surround • Dimensions: 12.5"(W) x 11"(H) x 9.25"(D) • Frequency Response: 35Hz-215Hz • Sensitivity: 83dB • Nominal Impedance: 2Ω (4+4) • Power Handling: 300W RMS / 900W Peak • Compatible with KTX-LK8 Linking Kit & KTX-EBKT Mounting Brackets • Compatible with iLX-W770-M & iLX-W670-M for Lighting Link Control



KTX-LK12 / LK10 / LK8

Alpine PrismaLink® Linking Kit

Linking Kit to Connect Multiple (2+) Alpine PrismaLink® Subwoofers Together • Available in 12" (KTX-LK12), 10" (KTX-LK10), & 8" (KTX-LK8)

KTX-EBKT

Universal Mounting Brackets

Mounts directly to side of Alpine PrismaLink® Subwoofers • Included Hardware for application with Alpine Halo, Shallow, Status and other universal subwoofer enclosures



Halo Enclosures



R2-SB12V

12" Alpine Halo R-Series Preloaded Subwoofer Enclosure with ProLink™

Preloaded R2-W12D4 12" R-Series Subwoofer • Unique Alpine Halo Design with ProLink™ • Ported Enclosure Design • Optimal Sound Performance • Threaded Subwoofer Mounting Inserts for Reversible Subwoofer Orientation • Kevlar Reinforced Pulp Cone • Polypropylene / Ceramic Composite Dust Cap • Large, Double-stacked Magnets for More Powerful Bass Output • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Dimensions: 17"(W) x 14.625"(H) x 15"(D) • X-Max: 20mm • Frequency Response: 24-200Hz • Vented Enclosure Tuning Frequency: 35Hz • Sensitivity: 85dB • Dual 4Ω Voice Coils Wired in Parallel for a 2Ω Load • Power Handling: 750W RMS / 2250W Peak • Recommended Amplifiers: R-A75M / R2-A75M • Compatible with KTX-H12 Linking Kit

R2-SB10V


10" Alpine Halo R-Series Preloaded Subwoofer Enclosure with ProLink™

Preloaded R2-W10D4 10" R-Series Subwoofer • Unique Alpine Halo Design with ProLink™ • Ported Enclosure Design • Optimal Sound Performance • Threaded Subwoofer Mounting Inserts for Reversible Subwoofer Orientation • Kevlar Reinforced Pulp Cone • Polypropylene / Ceramic Composite Dust Cap • Large, Double-stacked Magnets for More Powerful Bass Output • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Dimensions: 16"(W) x 12.6825"(H) x 14.5"(D) • X-Max: 20mm • Frequency Response: 24-200Hz • Vented Enclosure Tuning Frequency: 36Hz • Sensitivity: 85dB • Dual 4Ω Voice Coils Wired in Parallel for a 2Ω Load • Power Handling: 750W RMS / 2250W Peak • Recommended Amplifiers: R-A75M / R2-A75M • Compatible with KTX-H10 Linking Kit

KTX-H12 / KTX-H10

Alpine Halo Subwoofer Linking Kit

Available in 12" (KTX-H12) & 10" (KTX-H10)

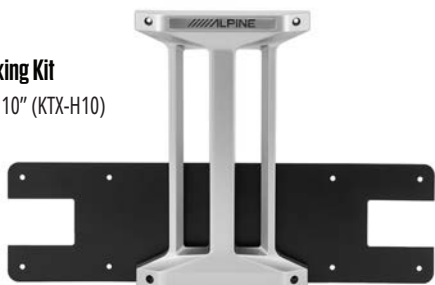

S2-SB12V

12" Alpine Halo S-Series Preloaded Subwoofer Enclosure with ProLink™

Preloaded S2-W12D4 12" S-Series Subwoofer • Unique Alpine Halo Design with ProLink™ • Ported Enclosure Design • Optimal Sound Performance • Binding Post Terminal Cup • Threaded Subwoofer Mounting Inserts for Reversible Subwoofer Orientation • Dimensions: 17"(W) x 14.625"(H) x 15"(D) • Frequency Response: 23Hz-215Hz • Vented Enclosure Tuning Frequency: 35Hz • Dual 4Ω Voice Coils Wired in Parallel for a 2Ω Load • Power Handling: 600W RMS / 1800W Peak • Recommended Amplifiers: S-A60M / S2-A60M • Compatible with KTX-H12 Linking Kit

S2-SB10V

10" Alpine Halo S-Series Preloaded Subwoofer Enclosure with ProLink™

Preloaded S2-W10D4 10" S-Series Subwoofer • Unique Alpine Halo Design with ProLink™ • Ported Enclosure Design • Optimal Sound Performance • Binding Post Terminal Cup • Threaded Subwoofer Mounting Inserts for Reversible Subwoofer Orientation • Dimensions: 16"(W) x 12.6825"(H) x 14.5"(D) • Frequency Response: 25Hz-215Hz • Vented Enclosure Tuning Frequency: 36Hz • Dual 4Ω Voice Coils Wired in Parallel for a 2Ω Load • Power Handling: 600W RMS / 1800W Peak • Recommended Amplifiers: S-A60M / S2-A60M • Compatible with KTX-H10 Linking Kit



Pictured: (2) Alpine Halo R2-SB12V 12" Enclosures linked with the KTX-H12 Linking Kit

Shallow Enclosures



Pictured: RS-SB12



Pictured: SS-SB10

RS-SB12

12" R-Series Shallow Preloaded Subwoofer Enclosure

Preloaded 12" R-Series Shallow Subwoofer (RS-W12D4) • Optimal Sealed Cabinet Quality • Alpine Gen2 DD Linear Magnetic Circuit • Aluminum Dust Cap • Neodymium Magnet • Pre-installed Steel Mesh Grille • Rubber, Modular & Stackable Foot Design • Dimensions: 26.5"(W) x 5.25"(H) x 17"(D) • Frequency Response 25Hz-200Hz • Sensitivity: 81 dB • Power Handling: 600W RMS / 1800W Peak • Nominal Impedance: 2Ω • Dual 4Ω voice coils wired in parallel for a 2Ω load • Compatible with S-A60M / S2-A60M or R-A75M / R2-A75M Amplifiers

SS-SB12

12" S-Series Shallow Preloaded Subwoofer Enclosure

Preloaded 12" S-Series Shallow Subwoofer • Optimal Sealed Cabinet Quality • Alpine Gen2 DD Linear Magnetic Circuit • Rugged Polymer Enclosure Cabinet • Water-Resistant Polypropylene Cone • Adjustable, Foam-padded Mounting Brackets for Flexible Installation & Reduced Vibration • Front-Mounted Neodymium Motor • Dimensions: 22.25"(W) x 5.25"(H) x 13.125"(D) • Frequency Response: 30Hz-200Hz • 11mm 1-Way Linear X-Max • Nominal Impedance: 2Ω • Power Handling: 300W RMS • Compatible with KTA-200M or KTA-30MW Amplifiers

RS-SB10

10" R-Series Shallow Preloaded Subwoofer Enclosure

Preloaded 10" R-Series Shallow Subwoofer (RS-W10D4) • Optimal Sealed Cabinet Quality • Alpine Gen2 DD Linear Magnetic Circuit • Aluminum Dust Cap • Neodymium Magnet • Pre-installed Steel Mesh Grille • Rubber, Modular & Stackable Foot Design • Dimensions: 21.15"(W) x 5.25"(H) x 16"(D) • Frequency Response 30Hz-200Hz • Sensitivity: 81 dB • Power Handling: 600W RMS / 1800W Peak • Nominal Impedance: 2Ω • Dual 4Ω voice coils wired in parallel for a 2Ω load • Compatible with S-A60M / S2-A60M or R-A75M / R2-A75M Amplifiers

SS-SB10

10" S-Series Shallow Preloaded Subwoofer Enclosure

Preloaded 10" S-Series Shallow Subwoofer • Optimal Sealed Cabinet Quality • Alpine Gen2 DD Linear Magnetic Circuit • Rugged Polymer Enclosure Cabinet • Water-Resistant Polypropylene Cone • Adjustable, Foam-padded Mounting Brackets for Flexible Installation & Reduced Vibration • Front-Mounted Neodymium Motor • Dimensions: 18.5"(W) x 4.5"(H) x 12.5"(D) • Frequency Response: 35Hz-200Hz • 11mm 1-Way Linear X-Max • Nominal Impedance: 2Ω • Power Handling: 300W RMS • Compatible with KTA-200M or KTA-30MW Amplifiers



SBT-S10V

10" Shallow Wedge Subwoofer Enclosure

Ported Enclosure Design with Preloaded SWT-10S2 Subwoofer • Designed to Fit Behind Most Seats • Mounts Horizontally or Vertically • Dimensions: 21-5/8"(W) x 15-1/4"(H) x 7-1/4"(D) • Frequency Response: 28Hz-200Hz • X-Max: 11mm • 2 Impedance • Power Handling: 350W RMS / 1000W Peak



PWE-S8

8" Compact Powered Subwoofer Enclosure

Preloaded 8" High Performance Quad-Coil Subwoofer • Built-in 120W RMS / 240W Peak Amplifier • Polypropylene / Aluminum Diaphragm • RCA and Speaker Level Inputs • Included Remote Bass Knob • Dimensions: 13-7/16"(W) x 2-13/16"(H) x 9-1/16"(D) • Frequency Response: 25Hz-152Hz



Truck Enclosures

Truck-sized Bass

Engineered for life in a truck, Alpine's purpose-built truck enclosures deliver *hard-hitting, controlled bass while preserving cabin space*. Designed for precise fitment and long-term durability, they bring serious low-end performance where it belongs.



R2-DB8V-TRK

Dual 8" Alpine Halo R-Series Preloaded Truck Subwoofer Enclosure with ProLink™

(2) Preloaded R2-W8D2 8" R-Series Subwoofers • Unique Alpine Halo Design with ProLink™ • Deep Bass Output • Great Low Frequency Extension • Side-Firing Cabin Loading Ports • Expandable width from 40" – 51" allows for compact, under-the-rear-seat installation in many full size trucks including; 2018+ RAM 1500 (Crew Cab), 2015+ Ford® F-150® (Crew Cab), 2018+ GMC Sierra / Chevrolet Silverado (Crew Cab), 2020+ Jeep® Gladiator and many other vehicle applications • Rubber, modular foot design accommodates trucks with uneven under seat areas • Integrated amplifier tray for hideaway amp installation • Dimensions: 40" - 51"(Adjustable-W) x 8-3/4"(H) x 13-3/4"(D) • Dual 4Ω Subwoofers Wired in Parallel for a 2Ω Load • Frequency Response: 32Hz-200Hz • Vented Tuning Frequency: 36Hz • Sensitivity: 84dB • Power Handling: 700W RMS (350W x 2) • Compatible with R-A75M / R2-A75M



S2-DB8V-TRK

Dual 8" Alpine Halo S-Series Preloaded Truck Subwoofer Enclosure with ProLink™

(2) Preloaded S2-W8D2 8" S-Series Subwoofers • Unique Alpine Halo Design with ProLink™ • Deep Bass Output • Great Low Frequency Extension • Side-Firing Cabin Loading Ports • Expandable width from 40" – 51" allows for compact, under-the-rear-seat installation in many full size trucks including; 2018+ RAM 1500 (Crew Cab), 2015+ Ford® F-150® (Crew Cab), 2018+ GMC Sierra / Chevrolet Silverado (Crew Cab), 2020+ Jeep® Gladiator and many other vehicle applications • Rubber, modular foot design accommodates trucks with uneven under seat areas • Integrated amplifier tray for hideaway amp installation • Dimensions: 40" - 51"(Adjustable-W) x 8-3/4"(H) x 13-3/4"(D) • Dual 4Ω Subwoofers Wired in Parallel for a 2Ω Load • Frequency Response: 35Hz-215Hz • Vented Tuning Frequency: 36Hz • Sensitivity: 84dB • Power Handling: 600W RMS (300W x 2) • Compatible with S-A60M / S2-A60M & OPTIM8® (PXE-C80-88)

Bass Series Subwoofers



Pictured: W-DB12V



Pictured: W-SB12V

W-DB12V NEW

12" Bass Series Dual Preloaded Vented Wedge Enclosure

Preloaded with (2) Alpine W12S4 12" Bass Series Subwoofers • Powerful Big Box Sound with Wedge Style Enclosure Design for Fitment Flexibility • Vas (Box Volume): ~83L • Polypropylene and Mica Cone with Poly-Foam Surround • Dimensions: 34-1/2"(W) x 20-1/2"(D) x 17-1/2"(H) • Impedance: 4Ω Each (Dual Terminal) • Sensitivity: 88dB • Frequency Response: 22Hz - 200Hz • Power Handling: 250W RMS / 750W Peak • Compatible with KTE-12PG Grille

W-SB12V NEW

12" Bass Series Preloaded Vented Wedge Enclosure

Preloaded with Alpine W12S4 12" Bass Series Subwoofer • Powerful Big Box Sound with Wedge Style Enclosure Design for Fitment Flexibility • Vas (Box Volume): ~44L • Polypropylene and Mica Cone with Poly-Foam Surround • Dimensions: 17-1/2"(W) x 20-1/2"(D) x 17-1/2"(H) • Impedance: 4Ω • Sensitivity: 88dB • Frequency Response: 22Hz - 200Hz • Power Handling: 250W RMS / 750W Peak • Compatible with KTE-12PG Grille

W-DB10V NEW

10" Bass Series Dual Preloaded Vented Wedge Enclosure

Preloaded with (2) Alpine W10S4 10" Bass Series Subwoofers • Powerful Big Box Sound with Wedge Style Enclosure Design for Fitment Flexibility • Vas (Box Volume): ~55L • Polypropylene and Mica Cone with Poly-Foam Surround • Dimensions: 30-1/2"(W) x 18-1/4"(D) x 15-1/2"(H) • Impedance: 4Ω Each (Dual Terminal) • Sensitivity: 87dB • Frequency Response: 24Hz - 200Hz • Power Handling: 250W RMS / 750W Peak • Compatible with KTE-10PG Grille

W-SB10V NEW

10" Bass Series Preloaded Vented Wedge Enclosure

Preloaded with Alpine W10S4 10" Bass Series Subwoofers • Powerful Big Box Sound with Wedge Style Enclosure Design for Fitment Flexibility • Vas (Box Volume): ~28L • Polypropylene and Mica Cone with Poly-Foam Surround • Dimensions: 15-1/2"(W) x 18-1/4"(D) x 15-1/2"(H) • Impedance: 4Ω • Sensitivity: 87dB • Frequency Response: 24Hz - 200Hz • Power Handling: 250W RMS / 750W Peak • Compatible with KTE-10PG Grille



W12S4

12" Bass Series Subwoofer

Polypropylene and Mica Cone with Poly-Foam Surround • Mounting Depth 5-5/16" • Frequency Response: 22Hz - 200Hz • Power Handling: 250W RMS / 750W Peak • Compatible with KTE-12PG Grille



W10S4

10" Bass Series Subwoofer

Polypropylene and Mica Cone with Poly-Foam Surround • Mounting Depth 5-1/16" • Frequency Response: 24Hz - 200Hz • Power Handling: 250W RMS / 750W Peak • Compatible with KTE-10PG Grille

ALPINE



PWE-SB10 NEW

10" Powered Subwoofer Wedge Enclosure

Preloaded 10" Wedge Style Subwoofer Enclosure w/Built-in Amplifier • Adjustable Bass Boost (0-12dB) • Included Sub Level Remote Control • Dimensions: 16-3/4"(W) x 13-1/2"(D) x 13-1/3"(H) • Weight: 30.5lbs • Frequency Response: 35Hz - 200Hz • Power Handling: 300W RMS / 450W Peak



SWT-10S2/S4

10" Shallow Subwoofer

Polypropylene and Mica Dust Cap with Pulp-Kevlar Cone • High-Amplitude Multi-Roll (H.A.M.R.) Surround for High Excursion • Mounting Depth 4-3/16" • Frequency Response: 30Hz - 200Hz • Power Handling: 350W RMS / 1000W Peak



DM-65C-G

6.5" Component 2-Way Speaker Set

Nominal Impedance 4Ω • Sensitivity: 92dB • Frequency Response: 65Hz - 20kHz • Power Rating: 50W RMS / 200W Peak • Grilles included



DM-65-G

6.5" Coaxial 2-Way Speaker Set

Nominal Impedance 4Ω • Sensitivity: 92dB • Frequency Response: 65Hz - 20kHz • Power Rating: 50W RMS / 200W Peak • Grilles included



EL-E65C-G

6.5" Component 2-Way Speaker Set

Nominal Impedance 4Ω • Sensitivity: 90dB • Frequency Response: 65Hz - 20kHz • Power Rating: 40W RMS / 160W Peak • Grilles included



EL-E65-G

6.5" Coaxial 2-Way Speaker Set

Nominal Impedance 4Ω • Sensitivity: 90dB • Frequency Response: 65Hz - 20kHz • Power Rating: 40W RMS / 160W Peak • Grilles included



PXE-X121-I2EV

12-Channel Amplifier & DSP Sound Processor

12-Channel Premium Digital Sound Processor with Built-In 12-Channel Amplifier • Hi-Res Audio Certified • 31-Band Parametric or Graphic EQ • HPF/LPF/Bandpass Crossover per channel • Matrix Input Summing • Software: PC or Smartphone control • Inputs: 12-Channel High Level, 2-Channel RCA, HD Bluetooth®, Optical, Coaxial, USB (DAC) • Outputs: 10-Channel High Level, 2-Channel RCA • Built-in 12-Channel Amplifier: 25W RMS x 4 + 50W RMS x 6 + 100W RMS x 2 • Sampling Rate: 96kHz/24Bit



KTA-450

4-Channel Amplifier with PowerStack™ Capability

PowerStack™ Capable with iLX-W770, iLX-W670, iLX-W650, and iLX-407 (Sold Separately) • Works with any Alpine Head Unit (non-PowerStack) • Alpine's Class D Amplifier Circuit with Exclusive Dynamic Peak Power Technology (DPP) • Dimensions: 7"(W) x 3.5"(H) x 1.5"(D) • S/N Ratio: >82dB • 50W RMS x 4 @ 2Ω/4Ω • 100W DPP x 4 @ 2Ω/4Ω • 100W RMS x 2 (Bridged into 4Ω) • 200W DPP x 2



KTA-200M

Mono Amplifier with PowerStack™ Capability

PowerStack™ Capable with iLX-W770, iLX-W670, iLX-W650, and iLX-407 (Sold Separately) • Works with any Alpine Head Unit (non-PowerStack) • Alpine's Class D Amplifier Circuit with Exclusive Dynamic Peak Power Technology (DPP) • Dimensions: 7"(W) x 3.5"(H) x 1.5"(D) • S/N Ratio: >80dB • 200W RMS x 1 @ 4Ω • 200W RMS x 1 @ 2Ω • 400W DPP x 1 @ 4Ω

*A complete list of head unit features and specs can be found on pages 60-63.



iLX-F511 Hi-Res AUDIO

Alpine Halo11 Digital Multimedia Receiver with 11-inch Floating HD Display and Hi-Res Audio Playback

11-inch Floating Style HD Touchscreen Display (Adjustable Height, Depth, and Viewing Angle) • Standard 1-DIN Chassis for Flexible Vehicle Application • HD Display (WXGA 1280 x 720px) • Apple CarPlay® (Wired & Wireless) • Android Auto™ (Wired & Wireless) • Bluetooth® Hands-Free • Hi-Res Audio Playback (96kHz / 24bit) • SiriusXM-Ready® • Built-in HD Radio® • iDataLink Maestro Compatible • Alpine DVR-C320R Dash Cam Compatible • Navigation Compatible with KTX-NS01 • AUX Input • HDMI Input & Output • Camera Inputs (x2) • USB Inputs (x2) • 4V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 13-Band Parametric EQ per channel • 6-Channel Time Correction • Compatible with KAC-001 Accessory Control Module (Page 48) • Compatible with RUX-H02 Bass/Volume Knob • Compatible with KAE-HF11DA Screen Protector

iLX-F509 Hi-Res AUDIO

Alpine Halo9 Digital Multimedia Receiver with 9-inch Floating HD Display and Hi-Res Audio Playback

9-inch Floating Style HD Touchscreen Display (Adjustable Height, Depth, and Viewing Angle) • Standard 1-DIN Chassis for Flexible Vehicle Application • HD Display (WXGA 1280 x 720px) • Apple CarPlay® (Wired & Wireless) • Android Auto™ (Wired & Wireless) • Bluetooth® Hands-Free • Hi-Res Audio Playback (96kHz / 24bit) • SiriusXM-Ready® • Built-in HD Radio® • iDataLink Maestro Compatible • Alpine DVR-C320R Dash Cam Compatible • Navigation Compatible with KTX-NS01 • AUX Input • HDMI Input & Output • Camera Inputs (x2) • USB Inputs (x2) • 4V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 13-Band Parametric EQ per channel • 6-Channel Time Correction • Compatible with KAC-001 Accessory Control Module (Page 48) • Compatible with RUX-H02 Bass/Volume Knob • Compatible with KAE-HF9DA Screen Protector

iLX-507 Hi-Res AUDIO

7-inch Digital Multimedia Receiver with HD Display and Hi-Res Audio Playback

7-inch HD Touchscreen Display • 1-DIN Chassis with Standard 2-DIN application • HD Display (WXGA 1280 x 720px) • Apple CarPlay® (Wired & Wireless) • Android Auto™ (Wired & Wireless) • Bluetooth® Hands-Free • Hi-Res Audio Playback (96kHz / 24bit) • Wireless Hi-Res Audio (requires LDAC compatible device) • SiriusXM-Ready® • Built-in HD Radio® • iDataLink Maestro Compatible • Alpine DVR-C320R Dash Cam Compatible • Navigation Compatible with KTX-NS01 • AUX Input • HDMI Input & Output • Camera Inputs (x2) • USB Inputs (x2) • 4V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 13-Band Parametric EQ per channel • 6-Channel Time Correction • Compatible with KAC-001 Accessory Control Module (Page 48)



RUX-H02

Next-Gen Alpine Halo Bass & Volume Knob

Controls subwoofer and main volume • Wireless Bluetooth® connection • Includes Alpine Halo head unit mount • Fits the iLX-F509, iLX-F511 • Works with iLX-507, i509-WRA-JK, and i509-WRA-JL



KAE-HF11DA / KAE-HF9DA

Alpine Halo Anti-Reflective Screen Protector

Direct-fit screen protector for Alpine Halo11 iLX-F511 (KAE-HF11DA) and Alpine Halo9 iLX-F509 (KAE-HF9DA) • Anti-fingerprint film • Anti-reflective film • Includes screen applicator tool, microfiber cloth, and dust removal sticker • Material: Plastic



KTX-SLEEVE

Alpine Single-DIN Installation Sleeve


Metal Installation sleeve for Alpine Single-DIN Receivers • Bendable tabs for secure vehicle application • Locking tabs for compatible Alpine Radios



RUE-4360

Universal Head Unit Remote Control

Remote control for any "Remote Ready" 2005 - up model Alpine head unit or AVN head unit.



Head Units & Accessories



iLX-W770-M NEW

7-inch Shallow-Chassis Digital Multimedia Receiver with Wireless Apple CarPlay® & Android Auto™

7-inch Anti-glare 2-DIN Touchscreen Display (WVGA: 800 x 480px) • Shallow Mount Design (2-6/16" Depth) • Award Winning PowerStack™ Design - Compatible with the KTA-450 & KTA-200M Amplifiers (Sold Separately) • Apple CarPlay® (Wired & Wireless) • Android Auto™ (Wired & Wireless) • Bluetooth® Hands-Free • SiriusXM-Ready® • Built-in HD Radio® • Camera Inputs (1) • USB Input • 4V Pre-Outs (x3) • Built-in Amplifier (16W RMS x 4) • 13-Band Graphic EQ • 6-Channel Time Correction • iDataLink Maestro Compatible • Lighting Link Compatible with PrismaLink® Subwoofers for LED Light Control



iLX-W670-M NEW

7-inch Shallow-Chassis Digital Multimedia Receiver with PowerStack™ Capability

7-inch Anti-glare 2-DIN Touchscreen Display (WVGA: 800 x 480px) • Shallow Mount Design (2-6/16" Depth) • Award Winning PowerStack™ Design - Compatible with the KTA-450 & KTA-200M Amplifiers (Sold Separately) • Apple CarPlay® (Wired) • Android Auto™ (Wired) • Bluetooth® Hands-Free • SiriusXM-Ready® • Built-in HD Radio® • Camera Inputs (1) • USB Input • 4V Pre-Outs (x3) • Built-in Amplifier (16W RMS x 4) • 13-Band Graphic EQ • 6-Channel Time Correction • iDataLink Maestro Compatible • Lighting Link Compatible with PrismaLink® Subwoofers for LED Light Control



iLX-407

7-inch Shallow-Chassis Digital Multimedia Receiver with PowerStack™ Capability

7-inch Anti-glare 2-DIN Touchscreen Display (WVGA: 800 x 480px) • Shallow Mount Design (2-6/16" Depth) • Award Winning PowerStack™ Design - Compatible with the KTA-450 & KTA-200M Amplifiers (Sold Separately) • Customizable User Interface & Wallpaper • Apple CarPlay® (Wired) • Android Auto™ (Wired) • Bluetooth® Hands-Free • SiriusXM-Ready® • Built-in HD Radio® • iDataLink Maestro Compatible • HDMI Input • Camera Inputs (2 RCA) • USB Input • 4V Pre-Outs (x3) • Built-in Amplifier (16W RMS x 4) • 5-Band Graphic EQ • 6-Channel Time Correction



iNE-W970HD

6.5-inch CD/DVD Receiver with Built-in GPS Navigation

6.5-inch Touchscreen WVGA Display (800 x 480px) • Built-in CD/DVD Player • Built-in Navigation with 2D & 3D Mapping • Quick Access Sound Key • Apple CarPlay® (Wired) • Android Auto™ (Wired) • Bluetooth® Hands-Free • SiriusXM-Ready® • Built-in HD Radio® • AUX Input • HDMI Input • Camera Inputs (x2) • USB Inputs (x2) • 4V Pre-Outs (x3) • Built-in Amplifier (45W RMS x 4) • 3-Band Graphic EQ • 6-Channel Time Correction • Audio Playback: AAC, FLAC, MP3, WMA • Steering Wheel Remote Control Ready



UTE-83BT NEW

Single DIN Shallow Chassis Advanced Bluetooth® Digital Media Receiver

Mech-less AM/FM Tuner • Single-DIN Shallow Chassis (4-1/4" depth) • 1-line, High Contrast LCD Display with RGB Illumination • Bluetooth® Hands-Free • Made for iPod® and iPhone® • Compatible with Android • Works with Pandora® Music • Front USB Port • Front AUX Port • 4V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 3-Band Parametric EQ • High Pass / Low Pass Crossover • Bass Engine SQ • Audio Playback via USB: AAC, FLAC, MP3, WMA • Included Remote Controller



UTE-63BT NEW

Single DIN Shallow Chassis Bluetooth® Digital Media Receiver

Mech-less AM/FM Tuner • Single-DIN Shallow Chassis (4-1/4" depth) • 1-line, High Contrast LCD Display with RGB Illumination • Bluetooth® Hands-Free • Compatible with Android • Works with Pandora® Music • Front USB Port • 2V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 3-Band Parametric EQ • High Pass / Low Pass Crossover • Bass Engine SQ • Audio Playback via USB: AAC, FLAC, MP3, WMA

Dash Camera's



DVR-C320R

Premium 1080p HD Dual Dash Camera System with Night Vision and Built-in Drive Assist


1080p HD Recording with Night Vision • Front and Rear Dual Cameras • Wide Dynamic Range (WDR) • 140-degree Field of View • Impact-Triggered Recording (Moving, Stationary, or Parked) • Front Collision Warning • Lane Departure Warning • Built-in Wi-Fi • Built-in GPS • Works with Alpine Recording Viewer App on Smartphone • PC Viewer Ready • Universal RCA Video Output • Universal Mounting Bracket • 12V CLA Easy-Installation • Included 32GB MicroSD Card • Compatible with Alpine iLX-F511, iLX-F509, iLX-507, i509-WRA-JL, and i509-WRA-JK Head Units (Full Camera Control and Viewing)



DVR-C310R

1080p HD Dual Dash Camera System with Impact Recording

1080p HD Recording • Front and Rear Dual Cameras • Wide Dynamic Range (WDR) • 140-degree Field of View • Impact-Triggered Recording (Moving, Stationary, or Parked) • Built-in Wi-Fi • Built-in GPS • Works with Alpine Recording Viewer App on Smartphone • PC Viewer Ready • Universal Mounting Bracket • 12V CLA Easy-Installation • Included 32GB MicroSD Card

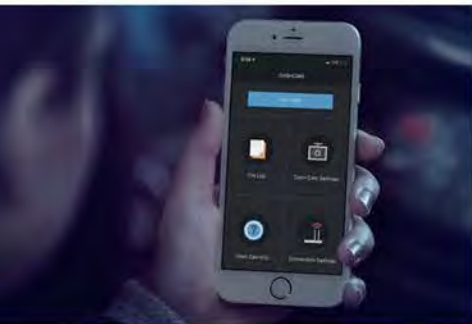



HCE-C2600FD

Multi-View High Dynamic Range (HDR) Front Camera

HDR (High Dynamic Range) technology enhances detail in light and dark conditions • Selectable 3 view modes (Panorama/Corner/Ground) with select Alpine head units via Direct Connection and Multi-Camera Selector • 180 degree horizontal / 125 degree vertical viewing angles • Automatic exposure and white balance adjustment • Wide Illumination Range (1.5 to 100,000 Lux) • IP 68 Water and Dust-proof • Universal Mounting Bracket and 33ft Direct Extension Cable Included • Compatible with multi-camera Selector (KCX-C250MC or KCX-C2600B sold separately) • Compatible with License Plate Camera Mounting Kit (KTX-C10LP sold separately)



HCE-C2100RD

Multi-View High Dynamic Range (HDR) Rear Backup Camera

HDR (High Dynamic Range) technology enhances detail in light and dark conditions • Selectable 4 view modes (Rear/Panorama/Corner/Ground) with select Alpine head units via Direct Connection and Multi-Camera Selector • 180 degree horizontal / 70 degree vertical viewing angles • Automatic exposure and white balance adjustment • Wide Illumination Range (1.5 to 100,000 Lux) • IP 68 Water and Dust-proof • Universal Mounting Bracket and 33ft Direct Extension Cable Included • Compatible with multi-camera Selector (KCX-C250MC or KCX-C2600B sold separately) • Compatible with License Plate Camera Mounting Kit (KTX-C10LP sold separately)



HCE-C1100

High Dynamic Range (HDR) Rear Backup Camera

HDR (High Dynamic Range) technology enhances detail in light and dark conditions • Direct Connection to select Alpine head units and Universal RCA Video Output • 131 degree horizontal, 103 degree vertical viewing angles • Automatic exposure and white balance adjustment • Wide Illumination Range (1.5 to 100,000 Lux) • IP 67 Water and Dust-proof • Universal Mounting Bracket and 23ft Direct Extension Cable Included • Compatible with Multi-Camera Selector (KCX-C250MC or KCX-C2600B sold separately) • Compatible with License Plate Camera Mounting Kit (KTX-C10LP sold separately)



KTX-C10LP

License Plate Camera Mounting Kit


High quality cast metal frame with rust free coating • Adjustable Tilt Angle up to 45 degree • Built-in LEDs increase visibility • Mounts using factory screw holes • Compatible with all Alpine front and rear view cameras (sold separately)



KCX-CAMI

Composite RCA to Direct Camera Adaptor for Alpine Head Units

Add an additional universal camera to your Alpine Head Unit • Compatible with all Alpine Head Units that include a Direct Camera Input

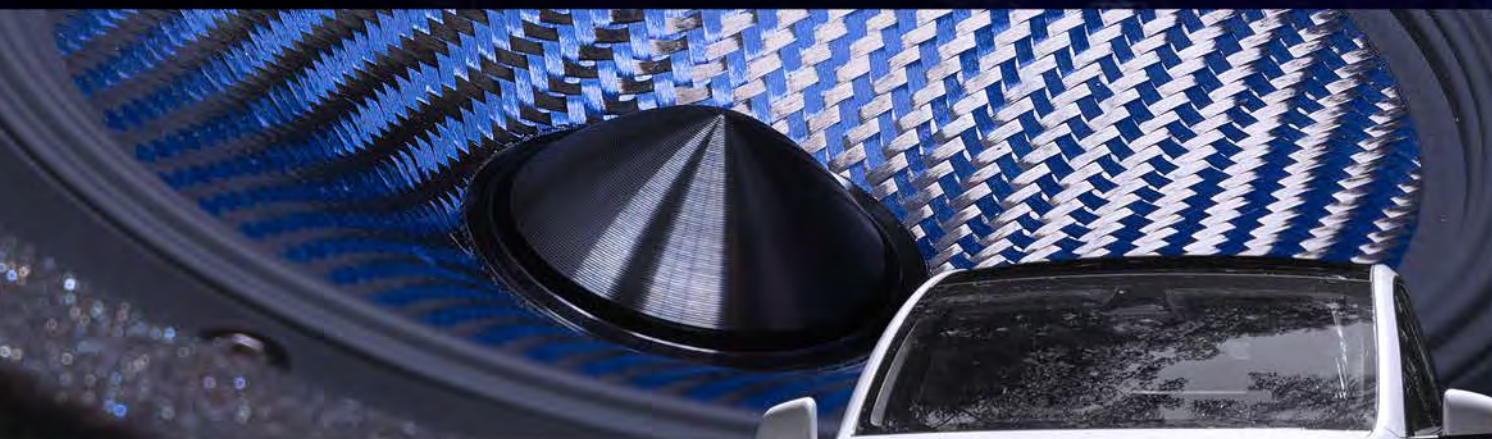

Tesla Audio

Ludicrous Sound, Go!

Designed specifically with the Tesla driver in mind, Alpine's plug-and-play speakers, subwoofers, and complete sound system solutions deliver *a seamless audio upgrade worthy of your Tesla*. Precision-engineered for perfect integration, they elevate sound without compromising the vehicle experience.



PSS-TSLA-M3B Hi-Res AUDIO NEW

13-Speaker Complete Sound System Upgrade for Tesla Model 3

13-Speaker Sound System Upgrade for Tesla Model 3 with Factory OEM Base Audio System
 • Direct-fit, Stealth Installation • Retain all OEM Function • Hybrid Carbon Fiber Speaker Cone Material • Alpine H.A.M.R. Surround Technology • Tuned Specifically for Tesla Interior • Optimized for EV Low Voltage Battery Range (12V-16V) • Ultra-efficient Amplifier: Uses 1 Mile of Range Per Hour at Full Volume

Included Components: (2) 6.5" Midrange Component Front Door Speakers with 1" Tweeters (50W RMS / 200W Peak), (4) 4" Midrange Rear Door / Rear Deck Speakers (40W RMS / 160W Peak), (3) 4" Midrange Center Dash Speakers with (1) 1" Center Dash Tweeter (40W RMS / 160W Peak), 10" Sealed Subwoofer (200W RMS / 500W Peak), 12-Channel Premium Digital Sound Processor with Built-in 12-Channel Amplifier (50W x 6, 25W x 4, 100W x 2 or 200W x 1 Bridged)

Vehicle-Specific Harness Sold Separately - varies based on VIN and manufacture date of vehicle. See Page 42 for harness options and fitment or visit alpine-usa.com.



PSS-TSLA-M3P Hi-Res AUDIO NEW

13-Speaker Complete Sound System Upgrade for Tesla Model 3 Premium

13-Speaker Sound System Upgrade for Tesla Model 3 with Factory OEM Premium Audio System
 • Direct-fit, Stealth Installation • Retain all OEM Function • Hybrid Carbon Fiber Speaker Cone Material • Alpine H.A.M.R. Surround Technology • Tuned Specifically for Tesla Interior • Optimized for EV Low Voltage Battery Range (12V-16V) • Ultra-efficient Amplifier: Uses 1 Mile of Range Per Hour at Full Volume

Included Components: (2) 6.5" Midrange Component Front Door Speakers with 1" Tweeters (50W RMS / 200W Peak), (4) 4" Midrange Rear Door / Rear Deck Speakers (40W RMS / 160W Peak), (3) 4" Midrange Center Dash Speakers with (1) 1" Center Dash Tweeter (40W RMS / 160W Peak), 10" Sealed Subwoofer (200W RMS / 500W Peak), 12-Channel Premium Digital Sound Processor with Built-in 12-Channel Amplifier (50W x 6, 25W x 4, 100W x 2 or 200W x 1 Bridged)

Vehicle-Specific Harness Sold Separately - varies based on VIN and manufacture date of vehicle. See Page 42 for harness options and fitment or visit alpine-usa.com.



PSS-TSLA-MY Hi-Res AUDIO NEW

13-Speaker Complete Sound System Upgrade for Tesla Model Y

13-Speaker Sound System Upgrade for 2020-2025 Tesla Model Y • Direct-fit, Stealth Installation
 • Retain all OEM Function • Hybrid Carbon Fiber Speaker Cone Material • Alpine H.A.M.R. Surround Technology • Tuned Specifically for Tesla Interior • Optimized for EV Low Voltage Battery Range (12V-16V) • Ultra-efficient Amplifier: Uses 1 Mile of Range Per Hour at Full Volume

Included Components: (2) 6.5" Midrange Component Front Door Speakers with 1" Tweeters (50W RMS / 200W Peak), (2) 4" Midrange Rear Door Speakers (40W RMS / 160W Peak), (2) 4" Midrange Rear Deck Speakers (40W RMS / 160W Peak), (3) 4" Midrange Center Dash Speakers with (1) 1" Center Dash Tweeter (40W RMS / 160W Peak), 10" Sealed Subwoofer (200W RMS / 500W Peak), 12-Channel Premium Digital Sound Processor with Built-in 12-Channel Amplifier (50W x 6, 25W x 4, 100W x 2 or 200W x 1 Bridged)

Vehicle-Specific Harness Sold Separately - varies based on VIN and manufacture date of vehicle. See Page 42 for harness options and fitment or visit alpine-usa.com.



PSS-TSUB-T3B NEW

10" Subwoofer & Amplifier Upgrade Kit for 2017-23 Tesla Model 3 Base

10" Sealed Subwoofer & Amplifier Upgrade Kit for 2017-2023 Tesla Model 3 with Factory Base Audio (no factory subwoofer) • Direct-fit, Stealth Installation in Passenger Side Rear Trunk Space of Model 3 • Plug-and-Play - no cutting or modification required • Retain all OEM Function • Hybrid Carbon Fiber Cone Material • Alpine H.A.M.R. Surround Technology • Tuned Specifically for the Tesla Interior • Frequency Response: 25Hz-300Hz • Power Handling: 200W RMS / 500W Peak • Includes Alpine KTA-200M Mono Amplifier, Line Out Converter Module, Plug-and-Play Integration & Power Harness • Sound Damping Recommended but Not Included



PSS-TSUB-T3A NEW

10" Subwoofer & Amplifier Upgrade Kit for 2017-23 Tesla Model 3 Premium

10" Sealed Subwoofer & Amplifier Upgrade Kit for 2017-2023 Tesla Model 3 Premium • Direct-fit, Stealth Installation in Passenger Side Rear Trunk Space of Model 3 • Replaces Factory Subwoofer in Factory Equipped Premium Sound Models (Not compatible with Base Audio Equipped Model 3) • Plug-and-Play - no cutting or modification required • Retain all OEM Function • Hybrid Carbon Fiber Cone Material • Alpine H.A.M.R. Surround Technology • Tuned Specifically for the Tesla Interior • Frequency Response: 25Hz-300Hz • Power Handling: 200W RMS / 500W Peak • Includes Alpine KTA-200M Mono Amplifier, Line Out Converter Module, Plug-and-Play Integration & Power Harness • Sound Damping Recommended but Not Included



PXE-X121-I2EV

12-Channel Amplifier & DSP Sound Processor (Fits Tesla Model 3 & Model Y)

12-Channel Premium Digital Sound Processor with Built-In 12-Channel Amplifier • Optimized for EV Low Voltage Battery Range (12V-16V) • Ultra-efficient Amplifier: Uses 1 Mile of Range Per Hour at Full Volume • 31-Band Parametric or Graphic EQ • HPF/LPF/Bandpass Crossover per channel • Matrix Input Summing • Software: PC or Smartphone control • Inputs: 12-Channel High Level, 2-Channel RCA, HD Bluetooth®, Optical, Coaxial, USB (DAC) • Outputs: 10-Channel High Level, 2-Channel RCA • Built-in 12-Channel Amplifier: 25W RMS x 4 + 50W RMS x 6 + 100W RMS x 2 • Sampling Rate: 96kHz/24Bit • Tesla Vehicle Tuning May Vary by Model, Trim, and Manufacture Date • Plug-and-Play Vehicle Harness Not Included (HRN-TSLA-•••)



HRN-TSLA

Installation Harness Kit for PSS-TSLA-M3B/M3P/MYP & PXE-X121-I2EV

Installation Harness Kit for Full Tesla Sound System Packages (PSS-TSLA-M3B, PSS-TSLA-M3P, & PSS-TSLA-MYP) and PXE-X121-I2EV 12 Channel DSP & Amplifier • Fits 2017-25 Tesla Model 3 & 2020-25 Tesla Model Y (*Harness varies based on vehicle VIN and manufacture date) • Included Components: (1) Integration Harness, (1) 12V Amplifier Power Harness with Alpine Fuse Holder • Supports Intel and AMD MCU • Plug and Play to Factory Connectors

Available Models: HRN-TSLA-MY1, HRN-TSLA-MY2, HRN-TSLA-MY3, HRN-TSLA-M3P1, HRN-TSLA-M3P2, HRN-TSLA-M3P3, HRN-TSLA-M3B1, HRN-TSLA-M3B2, HRN-TSLA-M3B3

**Visit alpine-usa.com for harness options and fitment.*



PSS-TSUB-TYA NEW

10" Subwoofer & Amplifier Upgrade for 2020-25 Tesla Model Y

10" Sealed Subwoofer & Amplifier Upgrade Kit for 2020-2025 Tesla Model Y • Direct-fit, Stealth Installation in Passenger Side Rear Trunk Space of Model Y • Replaces Factory Subwoofer in Model Y • Plug-and-Play - no cutting or modification required • Retain all OEM Function • Hybrid Carbon Fiber Cone Material • Alpine H.A.M.R. Surround Technology • Tuned Specifically for the Tesla Interior • Frequency Response: 25Hz-300Hz • Power Handling: 200W RMS / 500W Peak • Includes Alpine KTA-200M Mono Amplifier, Line Out Converter Module, Plug-and-Play Integration & Power Harness • Sound Damping Recommended but Not Included



EV-65CF-T

6.5" Component Front Door Speaker Set for 2017-25 Tesla Model 3 & 2020-25 Tesla Model Y

Direct-fit, Stealth Installation • Plug-and-Play Install - Replaces Factory Front Door Speakers on Tesla Model 3 & Model Y with no cutting or modification required • Tuned Specifically for Tesla Interior • Retains all OEM Function • Hybrid Carbon Fiber Speaker Cone Material • Alpine H.A.M.R. Surround Technology • Includes (2) 6.5" Woofer with Strontium Ferrite Magnet + 1" Tweeter with Neodymium Magnet • Frequency Response: 65Hz - 20kHz • Power Handling: 50W RMS / 200W Peak



EV-40M-T

4" Front Dash Speaker Upgrade Kit for 2017-25 Tesla Model 3 & 2020-25 Tesla Model Y

Direct-fit, Plug-and-Play, Stealth Installation • Integrated OEM Adapter Ring - Replaces Factory Front Dash Speakers on Tesla Model 3 & Model Y • Tuned Specifically for Tesla Interior • Hybrid Carbon Fiber Speaker Cone Material • Alpine H.A.M.R. Surround Technology • Includes (3) 4" Midrange Speakers with Strontium Ferrite Magnet + 1" Tweeter with Neodymium Magnet • Frequency Response: 90Hz - 20kHz • Power Handling: 40W RMS / 160W Peak • Some Dashboards are Not Equipped with a Factory Tweeter Location in Dash - Tweeter May Require Cutting or Professional Install • Tweeter Not Required for Use



EV-40MR-T

4" Rear Door/Deck/Hatch Speaker Set for 2017-25 Tesla Model 3 & 2020-25 Tesla Model Y

Direct-fit, Stealth Installation • Plug-and-Play Install - Replaces Factory Rear Door, Rear Deck, or Rear Hatch Speakers on Tesla Model 3 & Model Y • Tuned Specifically for Tesla Interior • Hybrid Carbon Fiber Speaker Cone Material • Alpine H.A.M.R. Surround Technology • Includes (2) 4" Midrange Speakers with Strontium Ferrite Magnet • Frequency Response: 90Hz - 20kHz • Power Handling: 40W RMS / 160W Peak • Some Models are Not Equipped with a Factory Rear Deck Speakers - Model 3 without Factory Equipped Rear Decklid Speakers May Require Cutting or Professional Install

Ford® Audio

Front Enclosure View

Bottom Enclosure View



NEW PSS-23FORD-F150

8-Speaker Complete Sound System Upgrade with OPTIM8® Technology for 2015-25 Ford® F-150®

8-Speaker Sound System Upgrade for 2015-25 Ford® F-150® Crew Cab Trucks • Includes: S-Series 600W RMS (300W x 2) Dual 8" Truck Subwoofer Enclosure (S2-DB8V-TRK), 8" S-Series Component Hi-Res Front Speakers (S2-S80C), 6.5" S-Series Coaxial Hi-Res Rear Speakers (S2-S65), Speaker Adapter Rings, Plug-and-Play OEM Integration Harnesses, and Alpine OPTIM8® 8-Channel Hi-Res Sound Processor & Amplifier with Automatic Sound Tuning (PXE-C80-88) • Plug-and-Play Installation • Pre-tuned for F-Series Truck Cabin Environment • Replaces Front and Rear Factory Speakers with Hi-Res Audio Certified S-Series Speakers for Improved Dynamic Audio Range • Adds Deeper Bass Output with S-Series Truck Enclosure - Installs Under-the-Rear Seat with Integrated OPTIM8® DSP & Amplifier for Compact, Sleek Look



Enclosure securely mounts under rear bench seat.



Integrated Amplifier Tray (shown above with S2-A55V)

Front Enclosure View



Bottom Enclosure View



PSS-23FORD-F150B0 NEW

8-Speaker Complete Sound System Upgrade for 2018-24 Ford® F-150® with Factory Premium B&O Audio System

8-Speaker Sound System Upgrade for 2018-24 Ford® F-150® Crew Cab Trucks with Factory Premium B&O Audio System • Includes: S-Series 600W RMS (300W x 2) Dual 8" Truck Subwoofer Enclosure (S2-DB8V-TRK), 8" S-Series Component Hi-Res Front Speakers (S2-S80C), 6.5" S-Series Coaxial Hi-Res Rear Speakers (S2-S65), Speaker Adapter Rings, Plug-and-Play OEM Integration Harnesses, and 5-Channel S-Series Amplifier (S2-A55V) • Replaces Front and Rear Factory Speakers with Hi-Res Audio Certified S-Series Speakers for Improved Dynamic Audio Range • Adds Deeper Bass Output with S-Series Truck Enclosure - Installs Under-the-Rear Seat with Integrated S2-A55V Amplifier for Compact, Sleek Look

PSS-24FORD-F150B0 NEW

8-Speaker Complete Sound System Upgrade for 2025+ Ford® F-150® with Factory Premium B&O Audio System

8-Speaker Sound System Upgrade for 2025+ Ford® F-150® Crew Cab Trucks with Factory Premium B&O Audio System • Includes: S-Series 600W RMS (300W x 2) Dual 8" Truck Subwoofer Enclosure (S2-DB8V-TRK), 8" S-Series Component Hi-Res Front Speakers (S2-S80C), 6.5" S-Series Coaxial Hi-Res Rear Speakers (S2-S65), Speaker Adapter Rings, Plug-and-Play OEM Integration Harnesses, and 5-Channel S-Series Amplifier (S2-A55V) • Replaces Front and Rear Factory Speakers with Hi-Res Audio Certified S-Series Speakers for Improved Dynamic Audio Range • Adds Deeper Bass Output with S-Series Truck Enclosure - Installs Under-the-Rear Seat with Integrated S2-A55V Amplifier for Compact, Sleek Look

PSS-24FORD-F150B0U NEW

8-Speaker Complete Sound System Upgrade for 2021-25 Ford® F-150® with Factory Premium B&O Unleashed Audio System

8-Speaker Sound System Upgrade for 2021-25 Ford® F-150® Crew Cab Trucks with Factory Premium B&O Unleashed Audio System • Includes: S-Series 600W RMS (300W x 2) Dual 8" Truck Subwoofer Enclosure (S2-DB8V-TRK), 8" S-Series Component Hi-Res Front Speakers (S2-S80C), 6.5" S-Series Coaxial Hi-Res Rear Speakers (S2-S65), Speaker Adapter Rings, Plug-and-Play OEM Integration Harnesses, and S-Series Mono Amplifier (S2-A60M) • Replaces Front and Rear Factory Speakers with Hi-Res Audio Certified S-Series Speakers for Improved Dynamic Audio Range • Adds Deeper Bass Output with S-Series Truck Enclosure - Installs Under-the-Rear Seat with Integrated S2-A60M Amplifier for Compact, Sleek Look




Jeep® Audio

Made for the Jeep® Lifestyle

Alpine's Jeep®-specific solutions are the result of years of research and a deep understanding of the Jeep lifestyle. ***Purpose-built for fitment, durability, and performance***, they deliver an uncompromising sound upgrade designed to meet the demands of life on and off the trail.



i509-WRA-JL



9-inch Weather-Resistant Digital Media Receiver for 2018-23 Jeep® Wrangler JL and Jeep® Gladiator JT

9-inch HD Anti-Glare Display (WXGA 1280 x 720px) • Jeep® Specific Trim Bezel • Weather-Resistant (Rated IP53) • Plug-and-Play Installation • Jeep® Specific Sound Tuning • Apple CarPlay® (Wired & Wireless) • Android Auto™ (Wired & Wireless) • Bluetooth® Hands-Free • Hi-Res Audio Playback (96kHz / 24bit) • SiriusXM-Ready® • Built-in HD Radio® • iDatalink Maestro Compatible • Alpine DVR-C320R Dash Cam Compatible • Navigation Compatible with KTX-NS01 • AUX Input • HDMI Input & Output • Camera Inputs (x2) • Dash Camera Input • USB Inputs (x2) • 4V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 13-Band Parametric EQ • 6-Channel Time Correction



i509-WRA-JK



9-inch Weather-Resistant Digital Media Receiver for 2011-18 Jeep® Wrangler JK

9-inch HD Anti-Glare Display (WXGA 1280 x 720px) • Jeep® Specific Trim Bezel • Weather-Resistant (Rated IP53) • Plug-and-Play Installation • Jeep® Specific Sound Tuning • Apple CarPlay® (Wired & Wireless) • Android Auto™ (Wired & Wireless) • Bluetooth® Hands-Free • Hi-Res Audio Playback (96kHz / 24bit) • Built-in HD Radio® • iDatalink Maestro Compatible • Alpine DVR-C320R Dash Cam Compatible • Navigation Compatible with KTX-NS01 • AUX Input • HDMI Input & Output • Camera Inputs (x2) • Dash Camera Input • USB Inputs (x2) • 4V Pre-Outs (x3) • Built-in Amplifier (18W RMS x 4) • 13-Band Parametric EQ • 6-Channel Time Correction



i407-WRA-JL



7-inch Digital Media Receiver for 2018-23 Jeep® Wrangler JL and Jeep® Gladiator JT

7-inch Anti-glare 2-DIN Touchscreen Display (WVGA: 800 x 480px) • Jeep® JL Dash Kit and Mounting Bracket • Jeep® Specific Wiring Harness • Plug-and-Play Installation • Jeep® Specific Sound Tuning • Customizable User Interface & Wallpaper • Apple CarPlay® (Wired) • Android Auto™ (Wired) • Bluetooth® Hands-Free • SiriusXM-Ready® • Built-in HD Radio® • iDatalink Maestro Compatible • HDMI Input • Camera Inputs (x2) • USB Input • 4V Pre-Outs (x3) • Built-in Amplifier (16W RMS x 4) • 5-Band Graphic EQ • 6-Channel Time Correction



i407-WRA-JK



7-inch Digital Media Receiver for 2011-18 Jeep® Wrangler JK

7-inch Anti-glare 2-DIN Touchscreen Display (WVGA: 800 x 480px) • Jeep® JK Dash Kit and Mounting Bracket • Jeep® Specific Wiring Harness • Plug-and-Play Installation • Jeep® Specific Sound Tuning • Customizable User Interface & Wallpaper • Apple CarPlay® (Wired) • Android Auto™ (Wired) • Bluetooth® Hands-Free • SiriusXM-Ready® • Built-in HD Radio® • iDatalink Maestro Compatible • HDMI Input • Camera Inputs (x2) • USB Input • 4V Pre-Outs (x3) • Built-in Amplifier (16W RMS x 4) • 5-Band Graphic EQ • 6-Channel Time Correction

*A complete list of features and specs can be found on page 67

Wrangler JL & Gladiator



PSS-24WRA

Complete Sound System Upgrade for the 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator JT

Complete, 5-Channel Powered Sound System Upgrade for 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator JT models • Compatible with 4-door, non-amplified models and 2-door models with non-scissor front seats • Includes Alpine's SPV-65-JLT Weather-Resistant (IP55 Rated) Rear Soundbar Speakers, SPV-65X-WRA Weather-Resistant (IP55 Rated) 6.5" Front Component Speakers with 1" Teteron Dome Tweeters, PWE-S8 120W 8" Powered Subwoofer, and KTP-445U 180W 4-Channel Power Pack Amplifier • Plug-and-Play Installation: Utilizes Factory Bolt Locations, Vehicle-specific Mounting Brackets and Vehicle-specific Harnesses/Connectors • Maintains Factory Look and Appeal • Tuned for the Unique Jeep® Cabin Environment • Compatible with Alpine i509-WRA-JL and i407-WRA-JL Head Units, Aftermarket Head Units, or Jeep® OEM Factory Head Unit.



PSS-23WRA2

Powered Sound System Upgrade for the 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator JT

Powered Sound System Upgrade for 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator JT models • Compatible with 4-door, non-amplified models and 2-door models with non-scissor front seats • Includes Alpine's PWE-S8 120W 8" Powered Subwoofer, KTP-445U 180W 4-Channel Power Pack Amplifier, and 1" Component Tweeters • Plug-and-Play Installation: Utilizes Factory Bolt Locations, Vehicle-specific Mounting Brackets and Vehicle-specific Harnesses/Connectors • Maintains Factory Look and Appeal • Tuned for the Unique Jeep® Cabin Environment • Compatible with Alpine i509-WRA-JL and i407-WRA-JL Head Units, Aftermarket Head Units, or Jeep® OEM Factory Head Unit.



SPV-65-JLT

Weather-Resistant Rear Soundbar Upgrade for the 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator JT

Rear Soundbar Upgrade Kit to Replace Factory 3-inch and 4-inch Speakers in 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator JT • Compatible with non-amplified factory models • Includes (2x) 6.5" Mid-bass Drivers with 1" Teteron Dome Tweeters • Vehicle-specific Connectors • Steel Frame • Weather-Resistant (IP55 Rated) • Rugged, Premium Grilles for Factory Look and Appeal • Frequency Response: 50Hz - 22kHz • Power Rating: 90W RMS / 270W Peak



KCX-F200INT

Premium Audio System Interface for Alpine Jeep® Head Units

Retains the Alpine OEM Premium Amplifier when installing an Alpine Restyle Head Unit in the 2018-23 Jeep® Wrangler JL and 2020-23 Jeep® Gladiator • Plug-and-Play installation with Alpine's i509-WRA-JL and i407-WRA-JL • Compact for Hidden Installation



KAC-001

External Accessory Control Module for Alpine Jeep® Head Units

Control accessories like winch, lights, air suspension, automatic trunk, and more directly from your Alpine Head Unit • (8) 250mA (-) accessory outputs • Pulsed, latched, or momentary output selection • Compatible with i509-WRA-JL & i509-WRA-JK Jeep Receivers & iLX-F511, iLX-F509, & iLX-F507 Universal Receivers



PSS-22WRA

Weather-Resistant Sound System Upgrade for the 2011-2018 Jeep® Wrangler JK Unlimited

Direct-fit Weather-Resistant 1200W, 9-Speaker Sound System Upgrade for 2011-2018 Jeep® Wrangler JK Unlimited models • Compatible with 4-door, non-amplified models • Includes all Weather-Resistant (IP55 Rated) Components: Alpine's SPV-65X-WRA 6.5" Component Speakers with 1" Teteron Dome Tweeters (2 Pairs), SBV-10-WRA 350W 10" Preloaded Enclosed Subwoofer, KTA-30FW 4-Channel Amplifier (75W x 4), and KTA-30MW 300W Mono Power Amplifier • Plug-and-Play Installation: Utilizes Factory Bolt Locations, Vehicle-specific Mounting Brackets and Vehicle-specific Harnesses/Connectors • Maintains Factory Look and Appeal • Tuned for the Unique Jeep® Cabin Environment • Compatible with any Alpine Jeep® Head Unit, Aftermarket Head Unit or Jeep® OEM Factory Head Unit.

SBV-10-WRA

10" Preloaded Subwoofer for 2007-18 Jeep® Wrangler JK and 2020-23 Gladiator JT

Preloaded 10" Sealed Custom-fit Enclosure • Compatible with 4-door models • Designed for Pressure-fit, Under the Passenger Seat Install; no mounting hardware is required • Weather-Resistant (IP66 Rated) • Nominal Impedance: 2Ω • Frequency Response: 45Hz - 200Hz • Power Handling: 300W RMS / 900W Peak

PWE-S8-WRA

8" Compact Powered Subwoofer for 2007-18 Jeep® Wrangler JK

Preloaded 8" High Performance Quad-Coil Subwoofer • Compatible with 4-door, non-amplified models • Mounts Under Driver's Seat using included Mounting Brackets • Built-in 120W RMS / 240W Peak Amplifier • Polypropylene / Aluminum Diaphragm • Included Remote Bass Knob • Dimensions: 13-7/16"(W) x 2-13/16"(H) x 9-1/16"(D)



SPV-65X-WRA

Weather-Resistant 2-Way Speaker System for 2007-2018 Jeep® Wrangler JK

Direct-fit 6.5-inch Component / Coaxial Speaker Set with 1" Teteron Dome Tweeters • Convertible Design; can be installed as component or coaxial using included adapters • Weather-Resistant (IP55 Rated) • Tuned for the Unique Jeep® Cabin Environment • Nominal Impedance: 4Ω • Frequency Response: 65Hz - 22kHz • Power Handling: 75W RMS / 225W Peak



SPV-10TW-WRA

Weather-Resistant 1" Component Tweeters for 2007+ Jeep® Wrangler JK/JL & Gladiator JT

Weather-Resistant 1" Component Tweeters • Plug-and-Play Installation: Utilizes Factory Locations and Vehicle-specific Harnesses/Connectors • Nominal Impedance: 4Ω • Frequency Response: 2kHz - 22kHz • Power Handling: 75W RMS / 225W Peak



HCE-RCAM-WRA

Spare Tire Mounted Rear-View HDR Camera for 2007-2018 Jeep® Wrangler JK


Alpine HCE-C1100 HDR Rear-View Camera (Details on Page 29) with Adjustable Mounting Bracket; installs behind the spare tire and extends the camera through the wheel spokes • Adjustable Camera Angle & Height • Additional programming may be required with factory dash systems.



ALP-HRN-CAMCH

Camera Input Harness for OEM Jeep® / Chrysler Radio

4' RCA Camera Input Cable • Compatible with radio for 2007-Up 430 REN, 430 RBZ, 430 RHB, 730N RER or 730N RHR • Additional programming required to activate the camera input with your Jeep® Wrangler factory dash system and can be done at your local Jeep® dealership

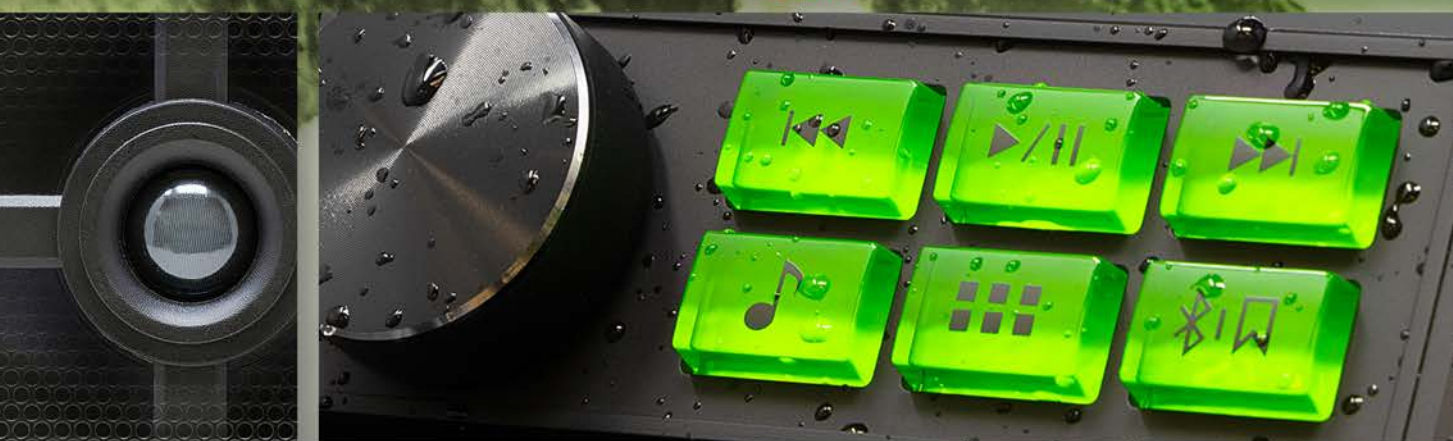

Off-Road Audio

Engineered for the Outdoors

Alpine brings its legacy of sound performance to the off-road world with purpose-built audio solutions for powersports applications. Built to withstand the elements, including dust, water, and vibration, these systems are ***designed for durability and tuned for clarity***, delivering premium Alpine sound wherever the terrain leads.

KAC-CMD-CTR

Weather-Resistant Digital Media Receiver w/4.3" Display for Side-by-Side & Marine

Weather-Resistant Digital Media Receiver • 4.3" Square Full Color Display w/Retro-inspired Design (Non-touchscreen) • Universal Compatibility with UTV's, ATV's, and other Powersports and Recreational Vehicles • Intuitive, easy-to-use controls with premium design • Large buttons and rotary knob designed for glove-friendly use • IP66-rated weather-resistance protects against dust, water, and UV rays • Superior screen finish with high brightness designed for ultimate visibility and clarity even in the sun • Bluetooth® Hands-Free and Audio Streaming for wireless connectivity • Made for iPhone® and iPod® • Works with Android (via Bluetooth® streaming) • USB and AUX inputs for versatile music playback • Built-in 17W RMS x 4-channel amplifier for powerful sound output • 7-band parametric EQ with HP/LP filters for optimal audio tuning • Three 4V RCA preouts (Front, Rear, Subwoofer) for system expandability • Subwoofer control for fine-tuned bass adjustments • Camera input for integration with a backup camera • Five-level dimmable illumination for varying light conditions • Universal rear U-bracket for easy installation in a 3" round gauge hole • Supports multiple audio formats: AAC, FLAC, MP2, MP3, M4A, OGG, WAV, WMA • Operating temperature range: -20°C to 60°C • Screen Size: 4.3 inches • Screen Resolution: 800x480 pixels • Inputs: 1 USB, 1 Aux, 1 Camera • Outputs: 3 RCA preouts (Front, Rear, Subwoofer)

SPV-65RGB-CAN

6.5" Weather-Resistant Universal Fit Speaker Cans for Side-by-Side / UTV

Weather-Resistant Premium 6.5" Speaker Cans • Universal Adjustable Brackets for Cage Bar Mounting on 1-3/4" to 2" Rails • Fits Side-by-Sides, UTV's, Buggies and more • Integrated RGB LED Lighting with Controller • Voice Coil: 25mm • Nominal Impedance 4Ω • Frequency Response: 50Hz - 22kHz • Power Handling: 90W RMS / 225W Peak • Optional Surface Mounting Brackets Sold Separately (KTE-65CAN-SM)

KTE-65CAN-SM

Surface Mount Brackets for SPV-65RGB-CAN

4-Bolt Mounting Brackets (Hardware Included) • Easily Swaps out with Standard Rail Mounts on SPV-65RGB-CAN

KTE-RGB-KO

RGB Controller for SPV-65RGB-CAN

RGB Control Switch • Made to Fit UTV Switch Panel • 10 Static Colors • 4 Dynamic Modes



Polaris® RZR®



PSS-PRZR

Weather-Resistant Sound System for Select 2013+ Polaris® RZR® Side-by-Sides

Complete Weather-Resistant Sound System Kit for Select 2013-Up Polaris® RZR® Side-by-Sides • Includes: KAC-CMD-CTR Digital Media Receiver w/4.3" Display • Preloaded 10" Sealed Subwoofer Enclosure (300W RMS/600W Peak, IPX7-Rated), (2) SPV-65RGB-CAN 6.5" Speaker Cans w/Integrated RGB Lighting and 1" Tweeters (includes adjustable brackets for bar mounting on 1-3/4" to 2" Rails), (2) 6.5" Front Speaker Pods with Molded Enclosures for Under Dash Installation, KTA-30MW Tough Power Pack 300W Mono Amplifier, KTA-30FW Tough Power Pack 4-Channel Amplifier (75W RMS x 4), Complete Wiring Kit with Plug-and-Play Integration Harnesses and RGB Knockout Panels • Weather-Resistant Components to protect against Dust, Water, and UV rays • Engineered to Complement the Factory Fit & Finish of your RZR • Bluetooth® Hands-Free and Audio Streaming for Wireless Connectivity • Made for iPhone® and iPod® • Works with Android (via Bluetooth® streaming) • USB and AUX Inputs for Versatile Music Playback • Subwoofer Control for Fine-Tuned Bass Adjustments • Models with Polaris Ride Command require KTX-RZR-LRB Head Unit Lower Mounting Bracket (sold separately)

**Visit alpine-usa.com for full list of compatible vehicles.*

Complete Systems





PSS-CMAV

Weather-Resistant Sound System for Select 2017+ CanAm® Maverick® Side-by-Sides

Complete Weather-Resistant Sound System Kit for Select 2017-Up CanAm® Maverick® Side-by-Sides • Includes: KAC-CMD-CTR Digital Media Receiver w/4.3" Display • Preloaded 10" Sealed Subwoofer Enclosure (300W RMS/600W Peak, IPX7-Rated), (2) SPV-65RGB-CAN 6.5" Speaker Cans w/Integrated RGB Lighting and 1" Tweeters (includes adjustable brackets for bar mounting on 1-3/4" to 2" Rails), (2) 6.5" Front Speakers with molded enclosures for dash installation w/Integrated RGB Lighting, KTA-30MW Tough Power Pack 300W Mono Amplifier, KTA-30FW Tough Power Pack 4-Channel Amplifier (75W RMS x 4), Complete Wiring Kit with Plug-and-Play Integration Harnesses and RGB Knockout Panels • Weather-Resistant Components to protect against Dust, Water, and UV rays • Bluetooth® Hands-Free and Audio Streaming for Wireless Connectivity • Made for iPhone® and iPod® • Works with Android (via Bluetooth® streaming) • USB and AUX Inputs for Versatile Music Playback • Subwoofer Control for Fine-Tuned Bass Adjustments

**Visit alpine-usa.com for full list of compatible vehicles.*





MARINE

Redefining Marine Audio

Embark on a new adventure with Alpine Marine, a new complete sound system line designed to deliver *premium Alpine sound on the water!* Built from the ground up without any compromise, our line redefines the standard for marine sound performance.

Head Units

MARINE



UTE-M801 NEW

Marine IP66 Waterproof Head Unit (NMEA-2000)

Waterproof Design: Front Panel: IP66-rated, Main Body/Chassis: IP55-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Waterproof Harness Connectors • 2.8" Full Color TFT Display (Non-touchscreen) • Universal Compatibility for Boats and Marine applications • Intuitive, easy-to-use controls with premium design • Bluetooth® 5.2 Hands-Free and Audio Streaming for wireless connectivity • MFi Certified for iPhone/iPad/iPod • USB-C and AUX inputs for versatile music playback • Built-in 17W RMS x 6-channel amplifier for powerful sound output • 6CHx4V (RCA) + 2CHx4V Sub OUT (RCA) • Two Zone RCA pre-outs for system expandability • 6-band parametric EQ for optimal audio tuning • Subwoofer control for fine-tuned bass adjustments • Five-level dimmable illumination for varying light conditions • Screen Size: 2.8 inches • Screen Resolution: 240x320 pixels • Inputs: 1 USB-C, 1 AUX (RCA), 1 3.5mm AUX for SWC • Dual Zone Outputs: 6 RCA preouts



UTE-M701 NEW

Marine IP66 Waterproof Head Unit (Non-NMEA)

Waterproof Design: Front Panel: IP66-rated, Main Body/Chassis: IP55-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Waterproof Harness Connectors • 2.8" Full Color TFT Display (Non-touchscreen) • Universal Compatibility for Boats and Marine applications • Intuitive, easy-to-use controls with premium design • Bluetooth® 5.2 Hands-Free and Audio Streaming for wireless connectivity • MFi Certified for iPhone/iPad/iPod • USB-C and AUX inputs for versatile music playback • Built-in 17W RMS x 6-channel amplifier for powerful sound output • 6CHx4V (RCA) + 2CHx4V Sub OUT (RCA) • Two Zone RCA pre-outs for system expandability • 6-band parametric EQ for optimal audio tuning • Subwoofer control for fine-tuned bass adjustments • Five-level dimmable illumination for varying light conditions • Screen Size: 2.8 inches • Screen Resolution: 240x320 pixels • Inputs: 1 USB-C, 1 AUX (RCA), 1 3.5mm AUX for SWC • Dual Zone Outputs: 6 RCA preouts



RUE-M101

Wireless Accessory Remote for UTE-M801 & UTE-M701

Wireless Accessory Remote for Alpine Marine Head Units UTE-M801 and UTE-M701 models • Low profile design • Long battery life • Easy control of playback functions



NEW **M-A120M**

Marine 1200W Mono Amplifier

Waterproof IPX6-rated with Watertight Top Panel Cover • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Best-in-Class Thermal Handling • Designed for All Day Playback without Shutdown • Top Cover Controls & One Side Terminal Layout allow for Easy Access to Amplifier Settings • Removable Terminals (OEM Ready) • Cast Aluminum End Panels • Dimensions: 13.27"(W) x 2.15"(H) x 6.5"(D) • Frequency Response: 10Hz-400Hz • Power Output: 1200W x 1 (2 Ω /1 Ω) • LPF: 50Hz-400Hz • Subsonic: 10Hz-50Hz • Compatible with Alpine RUX-M-UNIV Bass Knob



NEW **M-A110V**

Marine 5-Channel Amplifier

Waterproof IPX6-rated with Watertight Top Panel Cover • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Best-in-Class Thermal Handling • Designed for All Day Playback without Shutdown • Top Cover Controls & One Side Terminal Layout allow for Easy Access to Amplifier Settings • Removable Terminals (OEM Ready) • Cast Aluminum End Panels • Dimensions: 13.27"(W) x 2.15"(H) x 6.5"(D) • Frequency Response: 10Hz-40kHz (Ch. 1-4), 10Hz-400Hz (Ch. 5) • Power Output: 125W x 4 (4 Ω /2 Ω) + 600W x 1 (2 Ω /1 Ω) • Bridged Output (Ch. 1-4): 250W x 2 (4 Ω Minimum) • X-Over (Ch. 1-4): Off/HP/LP, 50-400Hz • Subsonic (Ch. 5): 10Hz-50Hz • LPF (Ch. 5): 50Hz-400Hz • Compatible with Alpine RUX-M-UNIV Bass Knob



NEW **M-A60F**

Marine 4-Channel Amplifier

Waterproof IPX6-rated with Watertight Top Panel Cover • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Best-in-Class Thermal Handling • Designed for All Day Playback without Shutdown • Top Cover Controls & One Side Terminal Layout allow for Easy Access to Amplifier Settings • Removable Terminals (OEM Ready) • Cast Aluminum End Panels • Dimensions: 10.12"(W) x 2.15"(H) x 6.5"(D) • Frequency Response: 10Hz-40kHz • Power Output: 150W x 4 (4 Ω /2 Ω) • Bridged Output: 300W x 2 (4 Ω Minimum) • X-Over (Ch. 1-4): Off/HP/LP, 50-400Hz • Compatible with Alpine RUX-M-UNIV Bass Knob



NEW **RUX-M-UNIV**

Marine Amplifier Bass Knob Accessory Kit

Bass Knob Accessory Kit for Alpine Marine Amplifiers (M-A120M, M-A110V, & M-A60F) • Subwoofer Level Control • Includes Universal Surface Mount Assembly w/0, 90, 180, & 270 degree mount options) & Optional Switch Knockout • Control range: 0 to -35dB level (SubW ch. use only) • Included RJ45 Cable w/5-meter length



Amplifiers

 MARINE



NEW **MRN-S88-CAN-LB / LW**

Marine Preloaded 8.8" Speaker Can Set

Waterproof IPX6-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Preloaded with Alpine MRN-S88 8.8" Speakers • Unique Grille Design with Integrated RGB LED Lighting • Industry-Leading Output & Alpine Signature Sound • Optimized for Outdoor Listening • 1.25" Silk Dome Tweeter • Integrated Passive Network • Carbon Fiber Hybrid Cone for Increased Accuracy • High Performance Dual Neodmium Motor • X-Max: 12.5mm • Power Handling: 150W RMS / 450W Peak • Available in White (MRN-S88-CAN-LW) & Black/Gray (MRN-S88-CAN-LB) • Mounts Sold Separately



Available in both Black & White options.
Shown above with KTX-MCLAMP-FB (sold separately).

KTX-MCLAMP-FB / SB / FS

Clamp Options for Mounting Marine Speaker Pods

3 Available Clamps/Mounting Options (Sold Separately):
KTX-MCLAMP-FB 1.75" - 3" Adjustable Fixed Bar Clamps (shown in image), **KTX-MCLAMP-SB** Swivel Bar Clamps, & **KTX-MCLAMP-FS** Fixed Surface Mount

NEW **MRN-S88-LB / LW**

Marine 8.8" Coaxial Speaker Set

Waterproof IPX6-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Unique Grille Design with Integrated RGB LED Lighting • Designed to be Played Loud with Industry-Leading Output & Alpine Signature Sound • Optimized for Outdoor Listening • 1.25" Silk Dome Tweeter • Integrated Passive Network • Carbon Fiber Hybrid Cone for Increased Accuracy • High Performance Dual Neodmium Motor • X-Max: 12.5mm • Power Handling: 150W RMS / 450W Peak • Available in White (MRN-S88-LW) & Black (MRN-S88-LB)



Pictured in Black
(MRN-S88-LB)

NEW **MRN-S77-LB / LW**

Marine 7.7" Coaxial Speaker Set

Waterproof IPX6-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Unique Grille Design with Integrated RGB LED Lighting • Designed to be Played Loud with Industry-Leading Output & Alpine Signature Sound • Optimized for Outdoor Listening • 1" Silk Dome Tweeter • Integrated Passive Network • Carbon Fiber Hybrid Cone for Increased Accuracy • FEA Optimized Ferrite Motor • X-Max: 7.5mm • Power Handling: 100W RMS / 300W Peak • Available in White (MRN-S77-LW) & Black (MRN-S77-LB)



Pictured in White
(MRN-S77-LW)

NEW **MRN-S65-LB / LW**

Marine 6.5" Coaxial Speaker Set

Waterproof IPX6-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Unique Grille Design with Integrated RGB LED Lighting • Designed to be Played Loud with Industry-Leading Output & Alpine Signature Sound • Optimized for Outdoor Listening • 1" Silk Dome Tweeter • Integrated Passive Network • Carbon Fiber Hybrid Cone for Increased Accuracy • FEA Optimized Ferrite Motor • X-Max: 7.5mm • Power Handling: 100W RMS / 300W Peak • Available in White (MRN-S65-LW) & Black (MRN-S65-LB)



Pictured in White
(MRN-S65-LW)

Speakers & Subwoofers

Integrated RGB Trim



Available in both Black & White options.

MRN-W12S4-LB / LW

NEW



Marine 12" Subwoofer

Waterproof IPX6-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Unique Grille Design with Integrated RGB LED Lighting • Waterproof Amphenol Plug for Speaker & LED • Designed to be Played Loud with Industry-Leading Output & Alpine Signature Sound • Optimized for Outdoor Listening • Carbon Fiber Hybrid Cone for Increased Accuracy • Infinite Baffle Optimized • X-Max: 20mm • Power Handling: 600W RMS / 1800W Peak • Available in White (MRN-W12S4-LW) & Black/Gray (MRN-W12S4-LB)



MRN-W10S4-LB / LW

NEW



Marine 10" Subwoofer

Waterproof IPX6-rated • Salt & Fog Resistant (ASTM B117) & UV Resistant (ASTM G154) • Unique Grille Design with Integrated RGB LED Lighting • Waterproof Amphenol Plug for Speaker & LED • Designed to be Played Loud with Industry-Leading Output & Alpine Signature Sound • Optimized for Outdoor Listening • Carbon Fiber Hybrid Cone for Increased Accuracy • Infinite Baffle Optimized • X-Max: 20mm • Power Handling: 600W RMS / 1800W Peak • Available in White (MRN-W10S4-LW) & Black/Gray (MRN-W10S4-LB)



PWE-S8-MRN

8" Compact Powered Subwoofer Enclosure for Marine

Preloaded 8" High Performance Quad-Coil Subwoofer • Built-in 120W RMS / 240W Peak Amplifier • Polypropylene / Aluminum Diaphragm • RCA and Speaker Level Inputs • Included Remote Bass Knob • Dimensions: 13-7/16"(W) x 2-13/16"(H) x 9-1/16"(D) • Frequency Response: 25Hz-152Hz



KTX-MRN-LED-RF

Marine LED Controller & Remote

RGB Controller for Alpine Marine Speakers & Subwoofers with Integrated RGB Lighting • Touch Sensitive Color Selection Wheel • Brightness & Speed Adjustment Levels • Mode Selection

Halo & Hi-Res Head Units



HARDWARE

SOFTWARE

COMPATIBILITY

	iLX-F511	iLX-F509	iLX-507
Display	11" WXGA	9" WXGA	7" WXGA
Screen Resolution	1280 x 720px (720p HD)	1280 x 720px (720p HD)	1280 x 720px (720p HD)
Button Illumination	White	White	White
Mech Size	Single Din	Single Din	Single Din
CD/DVD Player	No	No	No
Weather-Resistant (IP53)	No	No	No
Power	18W RMS / 50W Peak x 4	18W RMS / 50W Peak x 4	18W RMS / 50W Peak x 4
Pre-Outs	3 Pre-Outs (4V)	3 Pre-Outs (4V)	3 Pre-Outs (4V)
Aux In	Yes	Yes	Yes
AV Output	HDMI	HDMI	HDMI
Camera Input	Front + Rear + Dash Cam	Front + Rear + Dash Cam	Front + Rear + Dash Cam
HDMI Input	Yes	Yes	Yes
HDMI Output	Yes	Yes	Yes
USB Input	Yes (Dual)	Yes (Dual)	Yes (Dual)
Over the Air Updates (OTA)	Yes	Yes	Yes
Color Wallpaper Selection	8 Color Selectable	8 Color Selectable	8 Color Selectable
Apple CarPlay® & Android Auto™	Yes (Wireless & Wired)	Yes (Wireless & Wired)	Yes (Wireless & Wired)
Bluetooth®	Hands-Free & Streaming	Hands-Free & Streaming	Hands-Free & Streaming
Built-in GPS Navigation	No	No	No
HD® Radio	Yes	Yes	Yes
Pandora® Control	Yes	Yes	Yes
SiriusXM-Ready®	Yes + SiriusXM 360L	Yes + SiriusXM 360L	Yes + SiriusXM 360L
TIDAL Integration	No	No	No
Crossover	High Pass / Low Pass (Front/Rear/Sub)	High Pass / Low Pass (Front/Rear/Sub)	High Pass / Low Pass (Front/Rear/Sub)
DAC	24 bit	24 bit	24 bit
EQ	13-Band Parametric (per channel)	13-Band Parametric (per channel)	13-Band Parametric (per channel)
Bass Engine EQ	Yes	Yes	Yes
Media Xpander	Yes	Yes	Yes
Time Correction	6-Channel Time Correction	6-Channel Time Correction	6-Channel Time Correction
Hi-Res Audio Playback	Yes (96kHz / 24bit)	Yes (96kHz / 24bit)	Yes (96kHz / 24bit)
Audio Playback (via USB)	AAC/APE/FLAC/MP3/WAV/WMA	AAC/APE/FLAC/MP3/WAV/WMA	AAC/APE/FLAC/MP3/WAV/WMA
Photo Playback (via USB)	BMP/JPG/PNG	BMP/JPG/PNG	BMP/JPG/PNG
Video Playback (via USB)	AVC/FLV/H.264/MP4/MPEG-4/MKV/MOV	AVC/FLV/H.264/MP4/MPEG-4/MKV/MOV	AVC/FLV/H.264/MP4/MPEG-4/MKV/MOV
DVR-G320R Compatible	Yes	Yes	Yes
iDatalink Maestro Compatible	Yes	Yes	Yes
KAC-001 Compatible	Yes	Yes	Yes
KCX-G250MG Compatible	No	No	No
KCX-G2600B Compatible	Yes	Yes	Yes
KTX-NS01 Navigation Compatible	Yes	Yes	Yes
PowerStack™ Compatible	No	No	No
RUX-H02 Compatible	Yes	Yes	Yes
Steering Wheel Remote Compatible	Yes	Yes	Yes
Wireless Remote Compatible	Yes	Yes	Yes

PowerStack™ Head Units



HARDWARE

SOFTWARE

COMPATIBILITY

Display	6.75" WVGA	6.75" WVGA	6.95" WVGA
Screen Resolution	800 x 480px	800 x 480px	800 x 480px
Button Illumination	5 Color Changeable	5 Color Changeable	White
Mech Size	Double Din	Double Din	Double Din
CD/DVD Player	No	No	No
Weather-Resistant (IP53)	No	No	No
Power	16W RMS / 50W Peak x 4	16W RMS / 40W Peak x 4	16W RMS / 50W Peak x 4
Pre-Outs	3 Pre-Outs (4V)	3 Pre-Outs (4V)	3 Pre-Outs (4V)
Aux In	Yes	Yes	No
AV Output	No	No	Composite
Camera Input	Front + Rear	Front or Rear	Front + Rear RCA
HDMI Input	No	No	Yes
HDMI Output	No	No	No
USB Input	Yes	Yes	Yes
Over the Air Updates (OTA)	No	No	No
Color Wallpaper Selection	5 Color Selectable and Custom Image	5 Color Selectable and Custom Image	4 Color Selectable
Apple CarPlay® & Android Auto™	Yes (Wired & Wireless)	Yes (Wired Only)	Yes (Wired Only)
Bluetooth®	Hands-Free & Streaming	Hands-Free & Streaming	Hands-Free & Streaming
Built-in GPS Navigation	No	No	No
HD® Radio	No	No	Yes
Pandora® Control	Yes	Yes	Yes
SiriusXM-Ready®	Yes	Yes	Yes
TIDAL Integration	No	No	No
Crossover	High Pass / Low Pass	High Pass / Low Pass	High Pass / Low Pass
DAC	24 bit	24 bit	24 bit
EQ	13-Band Graphic	13-Band Graphic	5-Band Graphic
Bass Engine EQ	Yes	Yes	Yes
Media Xpander	No	No	No
Time Correction	6-Channel Time Correction	6-Channel Time Correction	6-Channel Time Correction
Hi-Res Audio Playback	No	No	No
Audio Playback (via USB)	AAC/FLAC/MP3/WAV/WMA	AAC/FLAC/MP3/WAV/WMA	AAC/FLAC/MP3/WAV/WMA
Photo Playback (via USB)	BMP/JPG/PNG	BMP/JPG/PNG	BMP/JPG/PNG
Video Playback (via USB)	AVI/MP4/MPG/MOV/WMV	AVI/MP4/MPG/MOV/WMV	AVI/MP4/MPG/MOV/WMV
DVR-G320R Compatible	No	No	No
iDatalink Maestro Compatible	Yes	Yes	Yes
KAC-001 Compatible	No	No	No
KCX-C250MC Compatible	No	No	No
KCX-C2600B Compatible	Yes	Yes	Yes
KTX-NSDI Navigation Compatible	No	No	No
PowerStack™ Compatible	Yes	Yes	Yes
PrismaLink® Compatible	Yes	Yes	No
Steering Wheel Remote Compatible	Yes	Yes	Yes
Wireless Remote Compatible	No	No	No

GPS & Single DIN Head Units

INE-W970HD

UTE-83BT

UTE-83BT

HARDWARE

SOFTWARE

COMPATIBILITY

Display	6.5" WVGA	1-Line LCD	1-Line LCD
Screen Resolution	800 x 480px	N/A	N/A
Button Illumination	7 Color Selectable	RGB	RGB
Mech Size	Double Din	Single Din	Single Din
CD/DVD Player	Yes	No	No
Weather-Resistant (IP53)	No	No	No
Power	16W RMS / 45W Peak x 4	18W RMS / 50W Peak x 4	18W RMS / 50W Peak x 4
Pre-Outs	3 Pre-Outs (4V)	3 Pre-Outs (4V)	3 Pre-Outs (2V)
Aux In	Yes	Yes (Front Panel)	No
AV Output	Composite	No	No
Camera Input	Front + Rear RCA	No	No
HDMI Input	Yes	No	No
HDMI Output	No	No	No
USB Input	Yes (Dual)	Yes (Front Panel)	Yes (Front Panel)
Over the Air Updates (OTA)	No	No	No
Color Wallpaper Selection	7 Color Selectable	N/A	N/A
Apple CarPlay® & Android Auto™	Yes (Wired Only)	N/A	N/A
Bluetooth®	Hands-Free & Streaming	Hands-Free & Streaming	Hands-Free & Streaming
Built-in GPS Navigation	Yes	N/A	N/A
HD® Radio	Yes	No	No
Pandora® Control	Yes	Yes	Yes
SiriusXM-Ready®	Yes	No	No
TIDAL Integration	No	No	No
Crossover	High Pass / Low Pass	High Pass / Low Pass	High Pass / Low Pass
DAC	24 bit	24 bit	24 bit
EQ	3-Band Graphic	3-Band Parametric	3-Band Parametric
Bass Engine EQ	Yes	Yes	Yes
Media Xpander	No	No	No
Time Correction	6-Channel Time Correction	No	No
Hi-Res Audio Playback	No	No	No
Audio Playback (via USB)	AAC/HE-AAC/MP3/WMA	AAC/FLAC/MP3/WMA	AAC/FLAC/MP3/WMA
Photo Playback (via USB)	No	N/A	N/A
Video Playback (via USB)	No	N/A	N/A
DVR-C32DR Compatible	No	No	No
iDataLink Maestro Compatible	No	No	No
KAC-001 Compatible	No	No	No
KCX-C250MC Compatible	No	No	No
KCX-C2600B Compatible	Yes	No	No
KTX-NSDI Navigation Compatible	Yes	No	No
PowerStack™ Compatible	No	No	No
RUX-H02 Compatible	No	No	No
Steering Wheel Remote Compatible	Yes	Yes	Yes
Wireless Remote Compatible	Yes	Yes	Yes

Jeep® Restyle Head Units



HARDWARE

SOFTWARE

COMPATIBILITY

Display	9" WXGA	6.95" WVGA	9" WXGA	6.95" WVGA
Screen Resolution	1280 x 720px (720p HD)	800 x 480px	1280 x 720px (720p HD)	800 x 480px
Button Illumination	Orange	White	White	White
Mech Size	Double Din	Double Din	Double Din	Double Din
CD/DVD Player	No	No	No	No
Weather-Resistant (IP53)	Yes	No	Yes	No
Power	18W RMS / 50W Peak x 4	16W RMS / 50W Peak x 4	18W RMS / 50W Peak x 4	16W RMS / 50W Peak x 4
Pre-Outs	3 Pre-Outs (4V)	3 Pre-Outs (4V)	3 Pre-Outs (4V)	3 Pre-Outs (4V)
Aux In	Yes	No	Yes	No
AV Output	HDMI	Composite	HDMI	Composite
Camera Input	Front + Rear + Dash Cam	Front + Rear RCA	Front + Rear + Dash Cam	Front + Rear RCA
HDMI Input	Yes	Yes	Yes	Yes
HDMI Output	Yes	No	Yes	No
USB Input	Yes (Dual)	Yes	Yes (Dual)	Yes
Over the Air Updates (OTA)	Yes	No	Yes	No
Color Wallpaper Selection	8 Color Selectable	4 Color Selectable	8 Color Selectable	4 Color Selectable
Apple CarPlay® & Android Auto™	Yes (Wireless & Wired)	Yes (Wired Only)	Yes (Wireless & Wired)	Yes (Wired Only)
Bluetooth®	Hands-Free & Streaming	Hands-Free & Streaming	Hands-Free & Streaming	Hands-Free & Streaming
Built-in GPS Navigation	No	No	No	No
HD® Radio	Yes	Yes	Yes	Yes
Pandora® Control	Yes	Yes	Yes	Yes
SiriusXM-Ready®	Yes + SiriusXM 360L	Yes	Yes + SiriusXM 360L	Yes
TIDAL Integration	No	No	No	No
Crossover	High Pass / Low Pass (Front/Rear/Sub)	High Pass / Low Pass	High Pass / Low Pass (Front/Rear/Sub)	High Pass / Low Pass
DAC	24 bit	24 bit	24 bit	24 bit
EQ	13-Band Parametric (per channel)	5-Band Graphic	13-Band Parametric (per channel)	5-Band Graphic
Bass Engine EQ	Yes	Yes	Yes	Yes
Media Xpander	Yes	No	Yes	No
Time Correction	6-Channel Time Correction	6-Channel Time Correction	6-Channel Time Correction	6-Channel Time Correction
Hi-Res Audio Playback	Yes (96kHz / 24bit)	No	Yes (96kHz / 24bit)	No
Audio Playback (via USB)	AAC/FLAC/MP3/WAV/WMA	AAC/FLAC/MP3/WAV/WMA	AAC/FLAC/MP3/WAV/WMA	AAC/FLAC/MP3/WAV/WMA
Photo Playback (via USB)	BMP/JPG/PNG	BMP/JPG/PNG	BMP/JPG/PNG	BMP/JPG/PNG
Video Playback (via USB)	AVC/FLV/H.264/MP4/MPEG-4/MKV/MOV	AVI/MP4/MPG/MOV/WMV	AVC/FLV/H.264/MP4/MPEG-4/MKV/MOV	AVI/MP4/MPG/MOV/WMV
DVR-C320R Compatible	Yes	No	Yes	No
iDatalink Maestro Compatible	Yes	Yes	Yes	Yes
KAC-001 Compatible	Yes	No	Yes	No
KCX-C250MC Compatible	No	No	No	No
KCX-C2600B Compatible	Yes	Yes	Yes	Yes
KTX-NS01 Navigation Compatible	Yes	No	Yes	No
PowerStack™ Compatible	No	No	No	No
RUX-H02 Compatible	Yes	No	Yes	No
Steering Wheel Remote Compatible	Yes	Yes	Yes	Yes
Wireless Remote Compatible	Yes	No	Yes	No



www.alpine-usa.com



@AlpineUSA • @AlpineTV • #AlpineSound

Alps Alpine North America, Inc. is solely responsible for the design and marketing of Alpine Restyle products. Alpine, Alpine Restyle, MediaXpander, OPTIM™, PrismaLink®, ProLink, and PowerStack are registered trademarks of Alps Alpine North America, Inc. All rights reserved. The Apple® iPhone® mobile digital device comes with the Multi-Touch™ touchscreen interface. Apple and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. Multi-Touch is a trademark of Apple Inc. Sirius Satellite Radio®, the dog logo, Sirius®, SiriusXM Internet Radio®, SiriusXM®, XM® and the SiriusXM logo are trademarks, service marks or registered marks of Sirius XM Radio Inc. HD Radio Technology manufactured under license from iBiquity Digital Corporation. U.S. and Foreign Patents. For patents see <http://dts.com/patents>. HD Radio and the HD, HD Radio, and "ARC" logos are registered trademarks or trademarks of iBiquity Digital Corporation in the United States and/or other countries. © iBiquity Digital Corporation. All Rights Reserved. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc. and any use of such marks by Alps Alpine North America, Inc. is under license. Other trademarks and trade names are those of their respective owners. PANDORA, the PANDORA logo, and the Pandora trade dress are trademarks or registered trademarks of Pandora Media, Inc., used with permission. Android and Android Auto™ are trademarks of Google LLC. All Rights Reserved. Jeep®, and Ram are registered trademarks of Stellantis NV. Chevrolet, Silverado, GMC Sierra are registered trademark of General Motors. Ford®, F-150®, and Bronco are registered trademarks of Ford Motor Company. iData, iDataLink, and Maestro are registered trademarks of Automotive Data Solutions. Tesla© is a copyright of Tesla, Inc. HERE is a registered trademark of HERE Global B.V. ROBLOX is a trademark of Roblox Corporation. Other trademarks and trade names are those of their respective owners. Product information listed in this brochure is based upon current information at the time of printing but cannot be guaranteed. All designs, features, specifications, and delivery dates are subject to change without notice. For updated product information, please visit www.alpine-usa.com.

Designed and Printed in the United States of America.